


### 1. USE

Cables with 4 twisted pairs, 100 ohms for high-speed data networks. 802.3 bt PoE++ up to type 4 applications compatible according to installation standards ISO/IEC 14763-2 : 2019 and EN 50174-2 : 2018

### 2. DESCRIPTION

8 x 23 AWG conductors with PE insulation Pe  
 4 pairs with individual aluminium/polyester tape screens

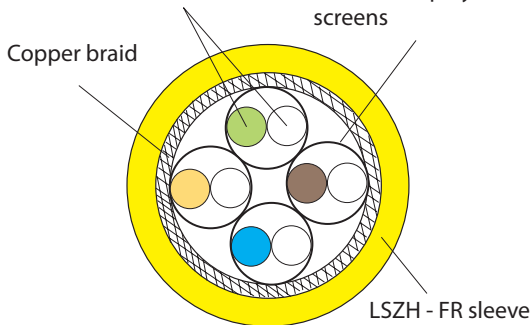

### 3. MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- EUROCLASS
- Velocity of propagation
- Traceability
- Measurement (length in meters).

Complementary marking (on label)

- Designation
- Made in....

### 4. PERFORMANCE AT 600 MHZ (STAND. ISO/IEC 11801)

Reference	0 328 82
Maximum attenuation (dB/100 m)	50,1
Minimum NEXT (dB)	60,7
PS NEXT (dB)	57,7
ACRF (dB / 100 m)	39,7
PS ACRF (dB / 100 m)	36,7
Return Loss (dB)	17,3

### 5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0 328 82
Type	S/FTP
Type of sleeve	LSOH - FR
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	1,3±0,4
Average nominal diameter of the cable (mm)	7,7 ± 0,5
Weight of cable (kg/km)	62
Min. bending radius when laying (mm)	62
AWG gauge*	23

\* According to UL 444 ed.3 table 4

### 6. ELECTRICAL FEATURES AT 20°C

Catalogue number	0 328 82
Type	S/FTP
Maximum linear resistance (ohm/km)	77*
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	78 %
Characteristic impedance at 100 MHz	100 ±5Ω

\* According to standard IEC 61156-5

**7. ORDERING INFORMATION**

Catalogue number	0 328 82
Type	S/FTP
Colour	Yellow RAL 1018
Pack (m)	500
Packaging	Reel

**8. ENVIRONMENTAL FEATURES**

Transport and storage temperature: -20 at + 60 °C  
Storage temperature before installation: 10°C during 24h (if stock ≤ 5°C)  
Usage temperature: - 20 to + 60 °C

Fire rating : EN 50399, IEC 60332-1-2, EN 60332-1-2, IEC 60332-3-24  
Smoke density : IEC 61034-2, EN 61034-2  
Toxicity of fire effluent : IEC 60754-2, EN 60754-2

EUROCLASS EN 13501-6 = Class B2ca s1a, d1, a1  
Also compliant with Cca, Dca, Eca

**9. STANDARDS AND APPROVALS**

Cat 7, 600 MHz  
Electrical performances and characteristics :  
- EN 50173-1  
- EN 50288-4-1  
- ISO/IEC 11801 (ed. 2.2)  
- IEC 61156-5  
IEEE 802.3bt : PoE++