


Data sheet

Commercial Art.No.: 93.420.4653.0

distributor BST14I2V 2P1T PB02

gesis® NV T-distributor, without fastening option, number of poles 2, rated voltage 50 V, rated current 3 A, number of inputs 1, number of outputs 2, color of coding/ contact carrier pastel blue

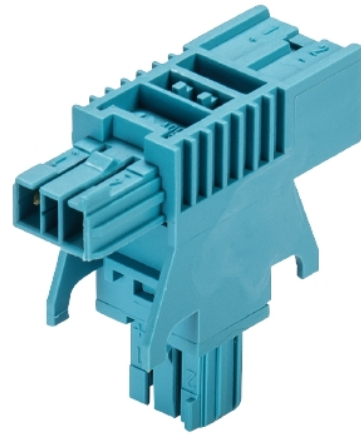

certificates / approvals



Technical data

general

rated current	3 A
rated voltage	50 V
rated impulse voltage	0.8 kV
pollution degree	2
mechanical coding	yes
lockable	self-locking (unlocking by hand)
color of coding/ contact carrier	pastel blue
marking of poles	1+, 2-
RAL-number coding/insert connector	5024

model

number of inputs	1
number of outputs	2
type of fastening	yes
degree of protection (IP)	IP20
type of distributor	T-distributor

material

housing material	polyamide
halogen free	yes
contact material	CuBe
fire load	0.034 kWh/St
insulation components continuous temperature	100 °C
surface finish	gilt

dimensions

length	37 mm
width	13 mm
height	34 mm

classification

ECLASS 11	
ECLASS 8.1	27440603
ETIM 9.0	EC002567
ETIM 8.0	EC002567
ETIM 7.0	EC002567
ETIM 6.0	EC002567
ETIM 5.0	EC002567
ETIM 4.0	EC002567

product compliance

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant