




PRODUCT DATASHEET

BIOLUX HCL PL 600 ZB 43W 2700-6500K

BIOLUX HCL PANEL ZIGBEE GEN 1 | Square recessed panel luminaire, Tunable White, 95 lm/W, Zigbee 3.0

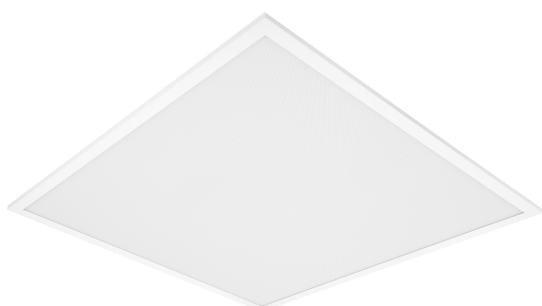

Areas of application

- Lighting solution for up to 40 BIOLUX HCL luminaires - BIOLUX HCL LED strips combined mit BIOLUX HCL control unit
- Open-plan office solution for up to 200 BIOLUX HCL luminaires combined with VIVARES ZIGBEE control unit
- Hotel and office rooms with little daylight

Product benefits

- Enables an individual lighting solution in combination with compatible Zigbee HCL lighting controls
- Biologically optimized lighting by adapting artificial light to natural daylight course
- 5 years BIOLUX HCL system guarantee when operated as part of a BIOLUX HCL system (BIOLUX HCL- - VIVARES ZIGBEE control unit in combination with BIOLUX HCL luminaire(s) - BIOLUX HCL LED strips)
- Can support working with more concentration
- Good glare reduction ($UGR \leq 19$)

Product features

- Zigbee 3.0 certified Tunable White luminaires - LED strips for simple integration into partner systems
- Ready for connection to BIOLUX HCL control unit
- Adjustable color temperature via Tunable White: 2,700...6,500 K
- Wireless communication between control unit and luminaries via Zigbee protocol
- Very high color rendering index Ra: > 90



TECHNICAL DATA

Electrical data


Nominal wattage	43.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	203 mA
Inrush current	20 A
Inrush current time T_{h50}	500 μ s
Max. number of luminaires per miniature circuit breaker B16	68
Max. number of luminaires per miniature circuit breaker C10	42
Max. number of luminaires per miniature circuit breaker C16	68
Power factor λ	≥ 0.90
Total harmonic distortion	< 20 %
Protection class	II
Operating mode	External LED driver

Photometrical data

Luminous flux	4000 lm
Luminous efficacy	95 lm/W
Color temperature	2700...6500 K
Light color (designation)	Warm White / Cool White / Cool Daylight
Color rendering index Ra	> 90
Standard deviation of color matching	≤ 3 sdc _m
Luminous intensity	-
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG1
Beam angle	80 °
UGR	< 19




BIOLUX HCL PL 600 ZB 43W 2700K



BIOLUX HCL PL 600 ZB 43W 2700K




BIOLUX HCL PL 600 ZB 43W 6500K



BIOLUX HCL PL 600 ZB 43W 6500K




BIOLUX HCL PL 600 ZB 43W 4000K



BIOLUX HCL PL 600 ZB 43W 4000K

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	11.00 mm
Product weight	3000.00 g

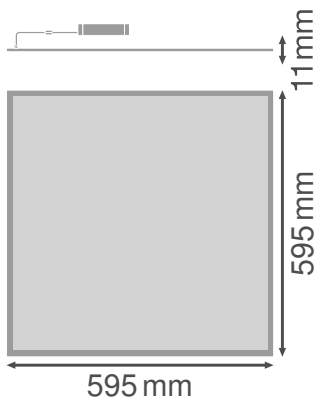

BIOLUX HCL PL 600 ZB 43W

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	PMMA
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Terminal, 3-Pole (L, N, PE)
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	Yes
Type of dimming	ZIGBEE
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting length	575 mm
Mounting width	575 mm
Mounting depth	50,0 mm
LED module replaceable	Not replaceable
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Lifespan L80/B10 at 25 °C	40000 h ¹⁾
Lifespan L90/B10 at 25 °C	25000 h
Number of switching cycles	50000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)



Control gear

Output current	1100 mA
----------------	---------

Certificates & Standards

Standards	CE / CB / ENEC / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

Accessories Optional

Product image	Product name	EAN
	PANEL 600 SURFACE MOUNT KIT H75	4058075472914
	CONNECTOR BOX 5POLE L/N 4x	4058075473010





EQUIPMENT / ACCESSORIES











- LEDVANCE BIOLUX app required for commissioning of the BIOLUX HCL system only (available for Android and iOS)
- LEDVANCE VIVARES app for project planning and required for commissioning of the VIVARES ZIGBEE system only (available for Android and iOS)






Safety advice



- Important operating notice and legal disclaimer: This product is exclusively intended for operation as part of a BIOLUX HCL system (BIOLUX HCL- or VIVARES ZIGBEE control unit in combination with BIOLUX HCL-Luminaire(s) / BIOLUX HCL LED strips including built-in or supplied firmware/software). LEDVANCE GmbH assumes no responsibility, liability, warranty or guarantee for the operation of the product in combination or conjunction with third-party products or other products that are not BIOLUX HCL- / VIVARES ZIGBEE system products.


DOWNLOAD DATA

Documents and certificates	Document name
 User Instruction	BIOLUX HCL PL ZB
 User Instruction	BIOLUX HCL PL ZB
 Addon Technical Information	BIOLUX HCL PL
 Extended installation guide	BIOLUX HCL SYSTEM EN

Documents and certificates		Document name
	Extended installation guide	BIOLUX HCL SYSTEM DE
	Extended installation guide	BIOLUX HCL FR
	Extended installation guide	Quick Installation Guide Vlvares Zigbee
	Legal information	BIOLUX HCL PL ZB
	Declarations of conformity	BIOLUX HCL
	Certificates	VDE BIOLUX HCL
	Certificates	VDE BIOLUX HCL
	Certificates	VDE BIOLUX HCL
Photometric and lighting design files		Document name
	IES file (IES)	BIOLUX HCL PL 600 ZB 43W 6500K
	IES files (IES, additional)	BIOLUX HCL PL 600 ZB 43W 4000K
	IES files (IES, additional)	BIOLUX HCL PL 600 ZB 43W 2700K
	LDT file (Eulumdat)	BIOLUX HCL PL 600 ZB 43W 2700K
	LDT files (Eulumdat, additional)	BIOLUX HCL PL 600 ZB 43W 6500K
	LDT files (Eulumdat, additional)	BIOLUX HCL PL 600 ZB 43W 4000K
	ULD file (DIALux)	BIOLUX HCL PL 600 ZB 43W 2700-6500K
	ROLF file (RELUX)	BIOLUX HCL PL 600 ZB
	UGR file (UGR table)	BIOLUX HCL PL 600 ZB 43W 2700K
	LDC typ cone	BIOLUX HCL PL 600 ZB 43W 2700K

Photometric and lighting design files		Document name
	LDC typ cone	BIOLUX HCL PL 600 ZB 43W 6500K
	LDC typ cone	BIOLUX HCL PL 600 ZB 43W 4000K
	LDC typ polar	BIOLUX HCL PL 600 ZB 43W 2700K
	LDC typ polar	BIOLUX HCL PL 600 ZB 43W 6500K
	LDC typ polar	BIOLUX HCL PL 600 ZB 43W 4000K

CAD/BIM files		Document name
	BIM_Revit_3D	BIOLUX HCL PL
	CAD_STEP_3D	HCL PL 600

Tender texts		Document name
	Tender documents	BIOLUX HCL PANEL ZIGBEE 600 ZB 43W 2700-6500K-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075364547	Folding box 1	648 mm x 51 mm x 651 mm	3748.00 g	21.51 dm ³
4058075364554	Shipping box 4	667 mm x 222 mm x 670 mm	16375.00 g	99.21 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

– For Guarantee see www.ledvance.com/guarantee

Legal advice

– The use of the LEDVANCE BIOLUX- / VIVARES-app is exclusively subject to the LEDVANCE BIOLUX- - VIVARES-app Terms of Use, which are displayed during installation of the app and are available in the app

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.