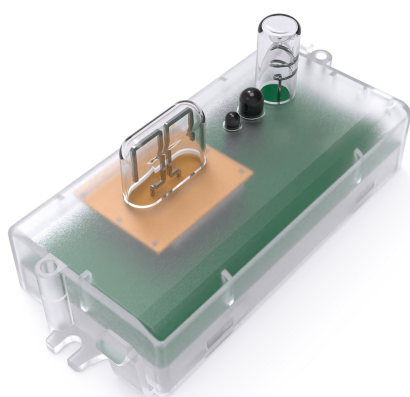# PRODUCT DATASHEET
SENSOR SF FLAT LEADER FOLLOWER

SURFACE FLAT SENSOR | High frequency sensor, corridor- and grouping function

Areas of application

– Suitable for SURFACE FLAT / SURFACE FLAT SENSOR 19 W / 27 W

Product benefits

– Multiple settings for sensor range, daylight detection, hold time and DIM-level /-period by DIP switches
– Wireless (radio frequency) communication with other sensor luminaires in a distance of up to 15 m
– Assignment of up to 15 groups and cross-group interaction (leader/follower or swarm function)
– Simple tool-free mounting in the luminaire
– 5 years guarantee

Product features

– Type of protection: IP20

TECHNICAL DATA

Electrical data

Nominal voltage	12 V
Nominal current	75 mA

Dimensions & Weight

Length	90 mm
Width	39 mm
Height	35 mm
Product weight	32.00 g

SEN SF FLAT LEADER FOLLOWER

Materials & Colors

Product color	Transparent
Body material	Plastic

Application & Mounting

Ambient temperature range	-25…+60 °C
Temperature range at storage	-40…+80 °C
Dimmable	No

Control gear

Nominal output current	75 mA
ECG lifetime	100000 h

Certificates & Standards

Standards	CE / CB / UKCA / EAC

Additional product data

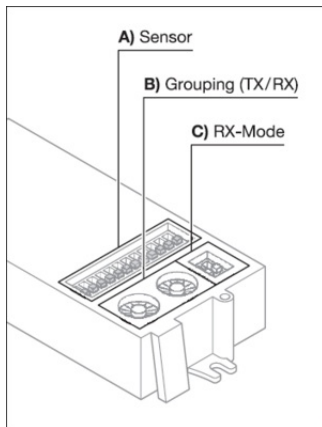|	
Product remark	Available from September 2024
Added function	EVERLOOP

EQUIPMENT / ACCESSORIES

– Connection wire for direct installation integrated

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854292897	Folding box 1	42 mm x 95 mm x 56 mm	53.00 g	0.22 dm³
4099854292903	Shipping box 10	196 mm x 101 mm x 96 mm	680.00 g	1.90 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.