

# PRODUCT DATASHEET

## TRUSYS UNIV P 73W 840 W CL PS

TRUSYS UNIVERSAL | The solution for refurbishment - universal fitting to existing trunking luminaire system

### Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Industry halls, high rack warehouse, hardware stores
- Discounters, supermarkets



PERFOR-  
MANCE  
CLASS

### Product benefits

- The solution for refurbishment: universal fitting to existing trunking luminaire system
- Easy installation, no tools required for connection
- Energy saving and cost-effective
- Flexible application due to a range of different lumen packages and beam angles
- 5 years guarantee

### Product features

- Multi Lumen function: power steps selectable
- Beam angles: 90° (W), 60° (N), 30° (VN)
- Click into place solution with smart click buttons
- Luminous efficacy: up to 180 lm/W
- Lifetime (L80/B10): up to 100,000 h (at 25 °C)
- Initial color consistency:  $\leq 3$  SDCM




## TECHNICAL DATA

### Electrical data


Nominal wattage	73 W / 66 W / 57 W / 49 W / 41 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	330...300...260...220...190 mA
Inrush current	0.33 A
Inrush current time $T_{h50}$	302 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	8
Max. number of luminaires per miniature circuit breaker C10	8
Max. number of luminaires per miniature circuit breaker C16	14
Power factor $\lambda$	$\geq 0.90$
Total harmonic distortion	$\leq 15\%$
Protection class	I
Operating mode	Integrated LED driver

### Photometrical data

Luminous flux	12400 lm / 11420 lm / 10030 lm / 8720 lm / 7380 lm
Luminous efficacy	170 lm/W / 173 lm/W / 176 lm/W / 178 lm/W / 180 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	$\leq 3$ sdc <sub>m</sub>
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	90 °

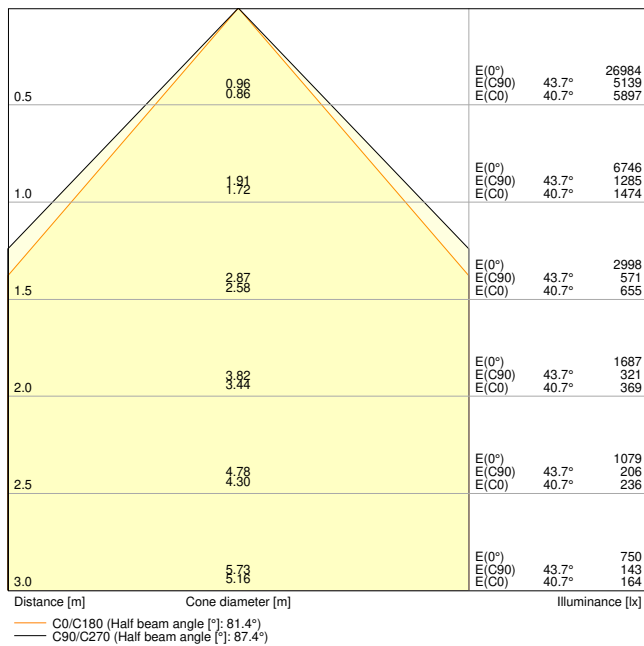


TRUSYS UNIV P 73W 840 W CL PS

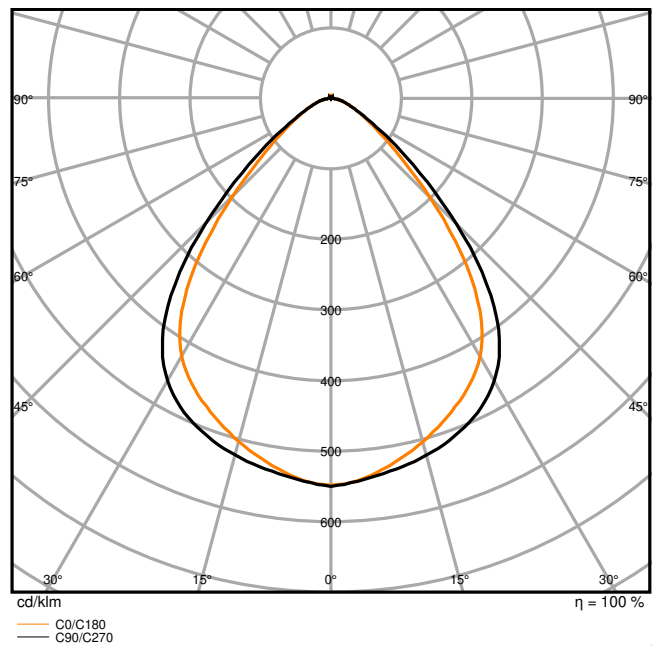

TRUSYS UNIV P 73W 840 W CL PS

Dimensions & Weight

Length	1504.00 mm
Width	68.00 mm
Height	26.00 mm
Product weight	1695.00 g



TRUSYS UNIV P 73/75W 840 CL  
PS/DALI

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-40...+80 °C
Type of connection	Plug-In connection
Type of protection	IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Mounting rail
Application environment	Indoor
Adjustable	No
LED module replaceable	Not replaceable
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	120000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	100000 h <sup>1)</sup>
Lifespan L90/B10 at 25 °C	54000 h
Number of switching cycles	50000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	450...400...350...300...250 mA
ECG - Output ripple current	< 5 %

### Certificates & Standards

Standards	CE / CB / UKCA / ENEC / TÜV / EAC
Luminaire with limited surface temperature, "D sign"	No

Ball shot safe	No
----------------	----












### Additional product data

Product remark	Available from September 2024
Added function	MULTI SELECT

### EQUIPMENT / ACCESSORIES

– Various accessories available

### DOWNLOAD DATA


Documents and certificates		Document name
	User Instruction	TRUSYS UNIVERSAL
	Addon Technical Information	LISO Insert TRUSYS UNIVERSAL
	Legal information	Legal insert
	Declarations of conformity	CE Declaration Trusys Universal
	Declarations Of Conformity UKCA	UKCA Declaration Trusys Universal
Photometric and lighting design files		Document name
	IES file (IES)	TRUSYS UNIV P 73W 840 W CL PS
	LDT file (Eulumdat)	TRUSYS UNIV P 73W 840 W CL PS
	UGR file (UGR table)	TRUSYS UNIV P 73W 840 W CL PS
	LDC typ cone	TRUSYS UNIV P 73W 840 W CL PS
	LDC typ polar	TRUSYS UNIV P 73W 840 W CL PS
CAD/BIM files		Document name
	CAD_STEP_3D	TRUSYS UNIV

LOGISTICAL DATA



Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854311628	Folding box 1	93 mm x 1,540 mm x 69 mm	1985.00 g	9.88 dm <sup>3</sup>
4099854311635	Shipping box 4	1,560 mm x 295 mm x 110 mm	9400.00 g	50.62 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



W	LM	1	2	3	4
41W	7380	—	—	—	ON
49W	8720	—	—	—	ON
57W	10030	—	—	—	ON
66W	11420	ON	—	—	—
73W	12400	—	—	—	—



1x TRUSYS UNIV		2x TRUSYS UNIV		6x TRUSYS UNIV	
CUU A	CUU B	CUU A	CUU B	CUU A	CUU B
TRUSYS UNIV ON/OFF	0	0	14	20.0 A	100.0 μs
TRUSYS UNIV DALI	0	0	12	31.0 A	100.0 μs

References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.