

PRODUCT DATASHEET

SP ADJ P 8W 927 PS DIM IP20 BK

SPOT ADJUST | Recessed mounted spotlight for indoor use, adjustable



Areas of application

- Direct replacement for recessed spotlights with halogen lamps
- General illumination
- Hotel rooms and corridors
- Bars, restaurants
- Accent lighting
- Galleries, museums
- Residential interiors

Product benefits

- Energy savings of up to 90 % compared to halogen lamp spotlights
- Powerselect: Brightness adjustment via dip switches on the driver
- Easy replacement of external driver thanks to plug with bayonet lock
- Easy installation and electrical connection thanks to tool-free electrical connectors
- SCALE Design – great appearance, valuable materials and small size fits into every surrounding
- 5 years guarantee

Product features

- Adjustable swivel angle: $\pm 25^\circ$
- Color rendering index R_a : 90
- Beam angle: 36°
- Die-cast aluminum housing
- Silicon-pad protected springs
- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- Through-wiring possible




TECHNICAL DATA

Electrical data


| | |
|---|-------------------------------|
| Nominal wattage | 8 W / 6 W / 4 W |
| Nominal voltage | 220...240 V |
| Mains frequency | 50...60 Hz |
| Nominal current | 38.000 mA |
| Inrush current | 2 A |
| Inrush current time T_{h50} | 60 μ s |
| Max. number of luminaires per miniature circuit breaker B16 | 336 |
| Max. number of luminaires per miniature circuit breaker C10 | 210 |
| Max. number of luminaires per miniature circuit breaker C16 | 336 |
| Power factor λ | 0.90 |
| Total harmonic distortion | < 20 % |
| Protection class | II |
| Operating mode | Electronic control gear (ECG) |

Photometrical data

| | |
|--|---------------------------|
| Luminous flux | 640 lm / 510 lm / 320 lm |
| Luminous efficacy | 80 lm/W |
| Color temperature | 2700 K |
| Light color (designation) | Warm white |
| Color rendering index Ra | 90 |
| Standard deviation of color matching | ≤ 3 sdc _m |
| Low flicker | Yes |
| Photobiological safety group acc. to EN62778 | RG1 |
| Beam angle | 36 ° |

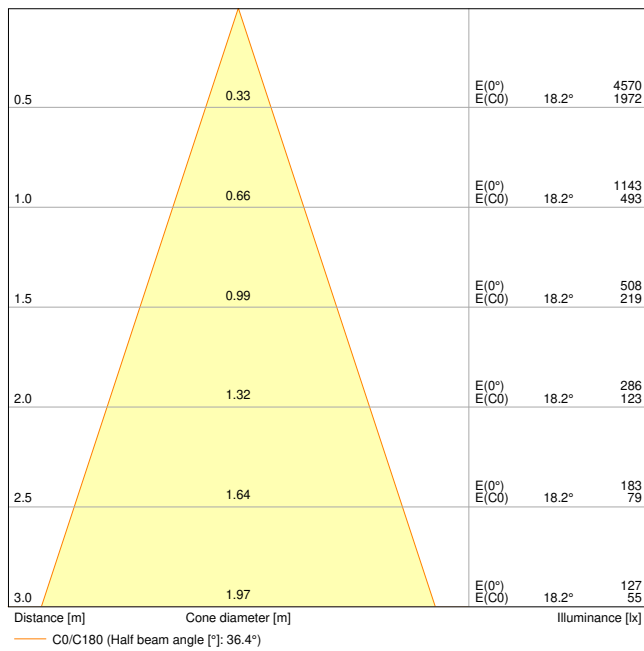


SP ADJ P 8W 927 PS DIM IP20 BK

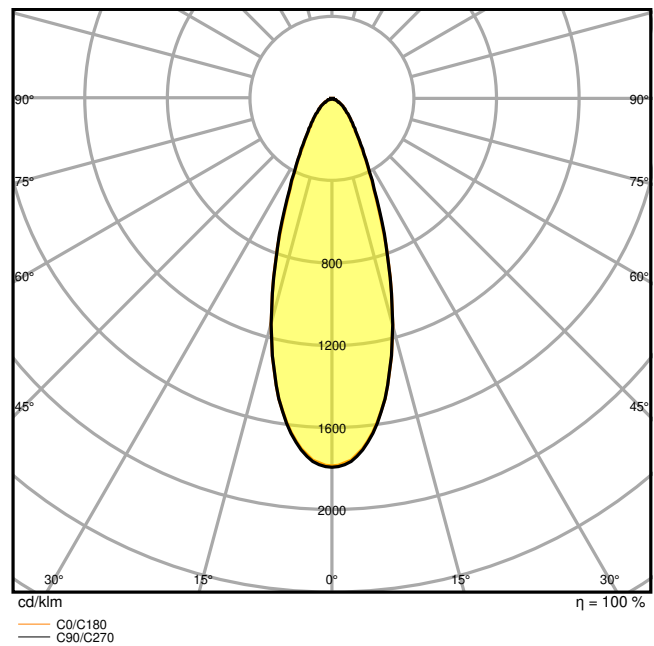

SP ADJ P 8W 927 PS DIM IP20 BK

Dimensions & Weight

| | |
|----------------|----------|
| Diameter | 81.00 mm |
| Height | 43.00 mm |
| Product weight | 220.00 g |



SP ADJ P 8W PS DIM IP20

Materials & Colors

| | |
|--|-------------------------------|
| Product color | Black |
| Housing color | Black |
| Body material | Aluminum |
| Cover material | Polymethylmethacrylate (PMMA) |
| Light emitting surface material | PMMA |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C |

| | |
|-----------------|--------|
| Mercury content | 0.0 mg |
|-----------------|--------|

Application & Mounting

| | |
|--|-----------------|
| Ambient temperature range | -20...+40 °C |
| Temperature range at storage | -42...+80 °C |
| Type of connection | Push terminal |
| Type of protection | IP20 |
| Protection class IK (shock resistance) | IK03 |
| Dimmable | Yes |
| Type of dimming | PHASE CUT |
| Mounting type | Recessed |
| Mounting location | Ceiling |
| Application environment | Indoor |
| Mounting diameter | 68 mm |
| Mounting depth | 50,0 mm |
| Adjustable | Yes |
| LED module replaceable | Not replaceable |
| With light source | Yes |

Lifespan

| | |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C | 50000 h ¹⁾ |
| Lifespan L80/B10 at 25 °C | 41000 h ¹⁾ |
| Lifespan L90/B10 at 25 °C | 18000 h |
| Number of switching cycles | 100000 |

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

| | |
|-----------------------------|----------|
| Output current | 180 mA |
| ECG - Output ripple current | < 5 % |
| ECG - Length | 68.00 mm |
| ECG - Width | 55,0 mm |
| ECG - Height | 22,0 mm |

Certificates & Standards

| | |
|--|---|
| Standards | CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD |
| Luminaire with limited surface temperature, "D sign" | No |

| | |
|----------------|----------------------|
| Ball shot safe | No |
| EPD | LEDV-00014-V01.01-EN |









Additional product data




| | |
|----------------|--------------|
| Added function | MULTI SELECT |
|----------------|--------------|








EQUIPMENT / ACCESSORIES

- External control gear included with dip-switches to select power during installation
- Refurbishment rings are available as accessory
- Selected DALI 2.0 driver available as accessory

DOWNLOAD DATA

| | Documents and certificates | Document name |
|--|---------------------------------|--|
|  | User Instruction | UI SP FIX P and SP FIX ADJ |
|  | Addon Technical Information | Light source Insert SP FIX P PS DIM IP44 |
|  | Addon Technical Information | Dimmerlist SPOT GEN2 |
|  | Legal information | Legal Insert |
|  | Declarations of conformity | CE Declaration of Conformity SPOT DIM |
|  | Declarations Of Conformity UKCA | UKCA Declaration of Conformity SPOT DIM |
|  | Declarations Of Conformity UKCA | SP DIM |
|  | Certificates | SP GEN2 |

| | Photometric and lighting design files | Document name |
|--|---------------------------------------|--------------------------------|
|  | IES file (IES) | SP ADJ P 8W 927 PS DIM IP20 BK |
|  | LDT file (Eulumdat) | SP ADJ P 8W 927 PS DIM IP20 BK |
|  | ULD file (DIALux) | SP ADJ P 8W 927 PS DIM |


| Photometric and lighting design files | | Document name |
|---|----------------------|--------------------------------------|
|  | ROLF file (RELUX) | SP ADJ P 8W 927 PS |
|  | UGR file (UGR table) | SP ADJ P 8W 927 PS DIM IP20 BK |
|  | LDC typ cone | SP ADJ P 8W 927 PS DIM IP20 BK |
|  | LDC typ polar | SP ADJ P 8W 927 PS DIM IP20 BK |
| CAD/BIM files | | Document name |
|  | BIM_Revit_3D | SP ADJ G2 |
|  | CAD_STEP_3D | SP ADJ |
| Tender texts | | Document name |
|  | Tender documents | SPOT ADJUST 8W 927 PS DIM IP20 BK-EN |


LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4099854000140 | Folding box 1 | 100 mm x 105 mm x 85 mm | 390.00 g | 0.89 dm ³ |
| 4099854000157 | Shipping box 20 | 562 mm x 230 mm x 195 mm | 8570.00 g | 25.21 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



| | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
|---|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|
| | Preset | | | |
|  | ON 1 2 | ON 1 2 | ON 1 2 | ON 1 2 |
| Current (CC) | 85mA | 140mA | 180mA | 140mA |
| Power | 4W | 6W | 8W | 6W |
| % rated lumen | 50% | 80% | 100% | 80% |

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.