


PRODUCT DATASHEET

Endura Hybrid Ball 2W White

Endura Hybrid Ground | Hybrid ground spike luminaires capable of using both, solar energy and power from electric grid

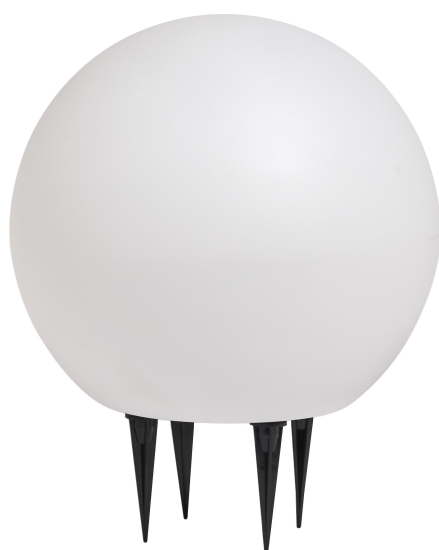

Areas of application

- Gardens and other outdoor areas
- Patios, balconies
- Entrance lighting
- Building facades

Product benefits

- Capable of using both, solar energy and power from electric grid
- Easy installation and tool-free electrical connection without professional knowledge, independent from power supply
- 12V direct current voltage for highest safety for human and animal
- Product types for different usecases available
- Various types with adjustable luminaire head
- Surface and ground mounting options with spikes
- Sustainable energy

Product features

- Maximum connected load per solar panel = 24W
- IP67 protection of connection plugs
- When connected to the power grid, luminaire automatically switches to mains current once solar panel battery runs out of energy
- IP44 protection of luminaires
- Durable housing material

TECHNICAL DATA

Electrical data

Nominal wattage	2.00 W
Nominal voltage	12 V
Nominal current	167.000 mA
Protection class	III
Operating mode	Mains voltage

Photometrical data

Luminous flux	180 lm
Total luminous flux of contained light sources	250 lm
Luminous efficacy	90 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤6 sdc _m
Flickering metric (Pst LM)	<1 %
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	120 °

Dimensions & Weight

Diameter	250.00 mm
Height	308.00 mm
Product weight	590.00 g
Cable length	300 mm



ENDURA HYBRID BALL 2W WT

Materials & Colors

Product color	White
Housing color	White
Body material	Plastic
Cover material	Polycarbonate (PC)

Glow Wire Test according to IEC 60695-2-12	650 °C
--	--------

Application & Mounting

Ambient temperature range	-20...40 °C
Type of connection	Fast connector
Type of protection	IP44
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Standing
Application environment	Outdoor
LED module replaceable	Not replaceable
With light source	Yes

Lifespan





Lifespan L70/B50 at 25 °C	25000 h ¹⁾
Number of switching cycles	12500

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No

DOWNLOAD DATA

Documents and certificates		Document name
	User Instruction	ENDURA HYBRID BALL 2W WT
	Legal information	ENDURA HYBRID
	Declarations of conformity	CE Declaration ENDURA HYBRID
	Declarations Of Conformity UKCA	UKCA Declaration ENDURA HYBRID

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075834705	Folding box 1	257 mm x 257 mm x 263 mm	843.00 g	17.37 dm ³
4058075834712	Shipping box 4	530 mm x 275 mm x 551 mm	4776.00 g	80.31 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.