

TBH.7014-Series

Indoor and outdoor led fitting for ceiling or wall installation. Body in self-extinguishing matt white, matt grey or matt black polycarbonate, silicone gasket with quick closure. Electronic driver 220-240V 50/60Hz. Manufactured in accordance with EN / IEC 60598-1.

MAIN FEATURES

	Class II		CRI >80		EN / IEC 60598-1
	Ceiling		Mac Adams 3		RG0/RG1
	Wall		IK 09		L80-B50 >100.000 h L90-B10 >60.000 h
			IP66		7 YEARS WARRANTY
			○ Matt white		
			○ Matt grey		
			● Matt black		



CODING


Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options
7014		B3		27 = 2700°K (CRI >80)		10		EL = on/off
		G3		30 = 3000°K (CRI >80)		16		LD = dali 2
		N3		40 = 4000°K (CRI >80)		22		
						28		

Δ LUMEN

°K	CRI	% Lm
27	> 80	-8.09%
30	> 80	-5.15%
40	> 80	standard

STANDARD EQUIPMENT

- 220-240Vac 50/60Hz driver.




Optic

120° extra-wide beam diffuser in anti-glare satin opal polycarbonate with high flux efficiency. Body in matt grey polycarbonate.

DIMENSIONS

	A (mm)	B (mm)	C (mm)	D (mm)	Kg
D1	280	-	55	62	0,9

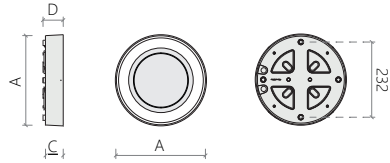

ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

PERFORMANCE

Code	W tot.	°K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7014G34010EL	10	4000K - CRI>80	1469	147	D1	○
7014G34016EL	16	4000K - CRI>80	2214	138	D1	○
7014G34022EL	22	4000K - CRI>80	2815	128	D1	○
7014G34028EL	28	4000K - CRI>80	3418	122	D1	○

