






TBH.7022-Series

Led indoor and outdoor wall fixture. Die cast aluminium body painted with matt white, matt grey, anthracite or dark brown epoxy polyester powder. AC direct 220-240V 50/60Hz led boards. Manufactured in accordance with EN / IEC 60598-1



MAINFEATURES

-  Class I
-  CRI >80
-  EN / IEC 60598-1
-  Wall
-  Mac Adams 3
-  RG0/RG1
-  IK 08
-  L80-B50 >75.000 h
L80-B20 >50.000 h
-  IP66
-  7 YEARS WARRANTY
- 
 - Matt white
 - Matt grey
 - Anthracite
 - Dark brown

CODING

Art. + Mod. ↑ + Mod. ↓ + *K (CRI)			+	W. tot.	+	Options	
7022	1	1	27	= 2700°K (CRI >80)	01	BL	= on/off <input type="radio"/> Matt white
	3	3	30	= 3000°K (CRI >80)	03	GL	= on/off <input type="radio"/> Matt grey
	6	6	40	= 4000°K (CRI >80)	04	NL	= on/off <input checked="" type="radio"/> Anthracite
	D	D			06	CL	= on/off <input type="radio"/> Dark brown
	RM				09		
	RB						

Δ LUMEN

	*K	CRI	%Lm
27	2700	> 80	-9.50%
30	3000	> 80	-6.50%
40	4000	> 80	standard

STANDARD EQUIPMENT

- AC direct led board.
- Phase cut dimming.





Optic

Upper beam with 90° narrow beam reflector in matt black painted steel sheet. Lower beam with 15°-90° reflector in matt black painted steel sheet. Extra-clear glass diffuser.

DIMENSIONS


	A (mm)	B (mm)	C (mm)	Kg
D1	60	60	70	0,5



ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

PERFORMANCE

Code	Mod	W tot.	*K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7022D14003BL	D-1	3	4000K - CRI>80	159	53	D1	○
7022D14006BL	D-1	6	4000K - CRI>80	318	53	D1	○
7022D14009BL	D-1	9	4000K - CRI>80	477	53	D1	○
Code	Mod	W tot.	*K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7022D34003BL	D-3	3	4000K - CRI>80	193	64	D1	○
7022D34006BL	D-3	6	4000K - CRI>80	385	64	D1	○
7022D34009BL	D-3	9	4000K - CRI>80	578	64	D1	○
Code	Mod	W tot.	*K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7022D64003BL	D-6	3	4000K - CRI>80	226	75	D1	○
7022D64006BL	D-6	6	4000K - CRI>80	453	75	D1	○
7022D64009BL	D-6	9	4000K - CRI>80	679	75	D1	○
Code	Mod	W tot.	*K - CRI	Lm OUTPUT	Lm/W	dimension	Color
7022DD4003BL	D-D	3	4000K - CRI>80	262	87	D1	○
7022DD4006BL	D-D	6	4000K - CRI>80	524	87	D1	○
7022DD4009BL	D-D	9	4000K - CRI>80	785	87	D1	○

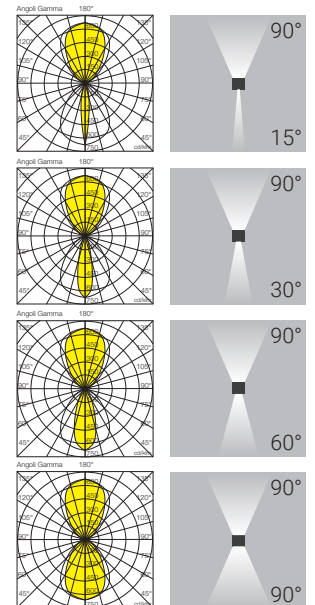

COLOR CODING

BL	Matt white	○	GL	Matt grey	○	NL	Anthracite	●	CL	Dark brown	●
----	------------	---	----	-----------	---	----	------------	---	----	------------	---