

# LANmark-OF Slimflex Patch Cords Singlemode

LANmark-OF Slimflex Patch Cord DSC/APC - DSC/APC SM LSZH  
Yellow X m

Contactpersoon

Sales

Telefoon: +31 6 15624711

datanetworks.nl@nexans.com

**Nexans Ref.:** N122.4DDYX

- Optical fiber patch cords
- LANmark-OF singlemode performance
- GIGAliteFLEX bend insensitive fibre
- For use in cabinets and workplaces

## OMSCHRIJVING

### Guarantees and installation

Nexans LANmark-OF optical fibre patch cords have been designed for indoor applications in support of high speed protocols.

High speed protocols supported include, but are not limited to Ethernet 1GBase-LX and Ethernet 10GBase-LR

Details on the supported distances can be found in the LANmark-OF warranty modules.

Typical installation environments are:

- Cabinets to connect patch panels to active equipment.
- Cross connects in data centres.
- Suitable for use in the work area to connect the workstation to the wall outlet (Fibre To The Desk).

### Characteristics

- Patch cord cable is according to IEC 60794-2-50
- Maximum insertion loss according to IEC 61300-3-4: 0.25 dB
- Typical insertion loss: 0.1 dB
- Minimum return loss according to IEC 61300-3-6 for LC/UPC: 50 dB
- Minimum return loss according to IEC 61300-3-6 for LC/APC: 65 dB
- Duplex LC-LC, duplex LC-SC and duplex SC-SC patch cords have a duplex cable construction with a diameter of 2 X 2.0 mm.
- Short connector boots of 19mm
- Small bend radius: 10 mm
- A traceability label is added close to the connector

### Fibre type

The LANmark-OF SM patch cords have LANmark-OF SM GIGAliteFLEX fibre inside. These fibres are bend insensitive and compliant to ITU-T G.657.A1 and to IEC 60793-2-50, fibre model B6.a1. The pigtail jacket of the singlemode pigtails is yellow.



**LANmark-OF**

## NORMEN

Internationale ISO/IEC 11801



Operating temp.  
-10 - 50 °C



Min. stat. buigradius  
10 mm



Vlamvertragend  
IEC 60332-1

Alle tekeningen, ontwerpen, specificaties, schema's en bijzonderheden m.b.t. gewichten, groottes en afmetingen in de technische of commerciële documentatie van Nexans zijn slechts indicatief. Ze zijn derhalve niet bindend voor Nexans en mogen niet worden behandeld als een toezegging van de kant van Nexans.

Aangemaakt 14-11-22 [www.nexans.nl](http://www.nexans.nl) Pagina 1 / 3



# LANmark-OF Slimflex Patch Cords Singlemode

LANmark-OF Slimflex Patch Cord DSC/APC - DSC/APC SM LSZH  
Yellow X m

Contactpersoon  
Sales  
Telefoon: +31 6 15624711  
datanetworks.nl@nexans.com

## Design

Nexans LANmark-OF patchcords designed according to the "Cross-Over" wiring principle to improve field installation (A1-B2, B1-A2). This conforms to the requirements of IEC 11801 and EN 50174-1:2009.

The "butterfly" duplex clip allows to change the polarity on site easily by simply removing the 2 connectors and put them in a reverse order back into the same clip. No tool is required for this polarity change.

## KARAKTERISTIEKEN

### Constructie

Afscherming/bewapening	Aramid yarn
Buitenmantel	LSZH-FR
Connector type	Duplex SC/APC-SC/APC
Fiber optic type	SingleMode 9/125
Kleur	Geel

### Afmetingen

Breedte	4 mm
Height	2 mm
Binnendiameter, nominaal	2,0 mm

### Transmission characteristics

Insertion Loss, maximum, dB	0,25 dB
Return Loss, Minimum, dB	65 dB

### Mechanische eigenschappen

Crush resistance (IEC 60794-1-E3)	100 N/cm
Maximum pulling force (IEC 60794-1-2-E1)	200 N

### Gebruik

Bedrijfstemperatuur, bereik	-10 - 50 °C
Minimale statische buigradius	10 mm
Vlamvertragend	IEC 60332-1



Operating temp.  
-10 - 50 °C



Min. stat. buigradius  
10 mm



Vlamvertragend  
IEC 60332-1

Alle tekeningen, ontwerpen, specificaties, schema's en bijzonderheden m.b.t. gewichten, groottes en afmetingen in de technische of commerciële documentatie van Nexans zijn slechts indicatief. Ze zijn derhalve niet bindend voor Nexans en mogen niet worden behandeld als een toezegging van de kant van Nexans.

Aangemaakt 14-11-22 [www.nexans.nl](http://www.nexans.nl) Pagina 2 / 3

## LANmark-OF Slimflex Patch Cords Singlemode

LANmark-OF Slimflex Patch Cord DSC/APC - DSC/APC SM LSZH  
Yellow X m


Contactpersoon

Sales

Telefoon: +31 6 15624711

datanetworks.nl@nexans.com

### SCHEMATIC POLARITY PATCH CORD

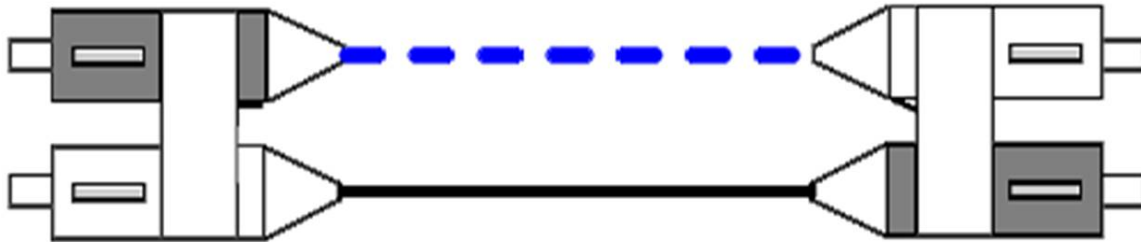

Cross-over patch cord (A1 to B2 & B1 to A2)