
	<b>TECHNICAL DATA SHEET</b>	code	<b>H126D04</b>
		version	<b>3</b>
		date	<b>2006-02-13</b>
	<b>COAX H126 DUOBONDPLUS PE</b>	page	<b>1/2</b>

## APPLICATION

Coaxial cables used in cabled distribution networks designed according the European Standard EN 50117 operating at frequencies between 5 MHz and 3000 MHz and the International Standard IEC 1196.

## CONSTRUCTION

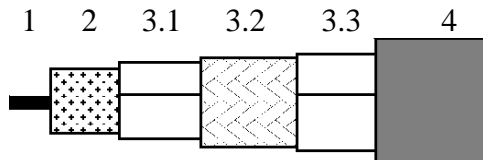

1	Inner conductor	Solid soft annealed copper
2	Dielectric	Gas injected PE
3.1	Foil	AL-PET-AL bonded to dielectric
3.2	Braid	Annealed tinned copper
3.3	Foil	AL-PET (L-folded) bonded to sheath
4	Sheath	PE according the European Standard HD 624.

## REQUIREMENTS AND TEST METHODS

**Test methods in accordance with European standard EN 50117-1.**

### Mechanical characteristics

1. Inner conductor:	
Diameter:	1.00 mm ± 0.03 mm
2. Dielectric:	
Diameter:	4.57 mm ± 0.15 mm
Adhesion:	7.8 – 78 N at 25 mm
3. Outer conductor:	
Diameter screen:	5.4 mm ± 0.2 mm
Foil overlap (both):	≥ 1 mm
Coverage braid:	45 % ± 5 %
4. Sheath:	
Diameter:	6.9 mm -0.2/+0.6 mm
Tensile strength:	≥ 10 N/mm <sup>2</sup>
Elongation at break:	≥ 300 %
5. Cable:	
Crush resistance of cable:	< 1% (load of 700N)
Storage/operating temperature:	-40°C to +70°C
Minimum installation temperature:	-5 °C
Minimum static bend radius:	65 mm
Total weight:	40.5 g/m



<b>TECHNICAL DATA SHEET</b>	code	<b>H126D04</b>
	version	<b>3</b>
	date	<b>2006-02-13</b>
<b>COAX H126 DUOBONDPLUS PE</b>	page	<b>2/2</b>

**Electrical characteristics**

Mean characteristic impedance:	75 ± 3 Ω
Regularity of impedance:	> 40 dB
DC loop resistance:	≤ 37 Ω/km
DC resistance inner conductor:	≤ 23 Ω/km
DC resistance outer conductor:	≤ 14 Ω/km
Capacitance:	54 pF/m ± 2 pF/m
Velocity ratio:	0.82 ± 0.02
Insulation resistance:	> 10 <sup>4</sup> MΩ.km
Voltage test of dielectric:	2 kVdc
Screening efficiency after flexing at	
30-1000 MHz:	≥ 95 dB
1000-2000 MHz:	≥ 85 dB
2000-3000 MHz:	≥ 75 dB

Return loss at	5-470 MHz:	≥ 20 dB*
	470-1000 MHz:	≥ 18 dB*
	1000-2000 MHz:	≥ 16 dB*
	2000-3000 MHz:	≥ 15 dB*

\*Max. 3 peak values 4 dB lower than specified.

Attenuation at	Nominal	Attenuation at	Nominal
5 MHz:	1.8 dB/100m	1000 MHz:	21.1 dB/100m
50 MHz:	4.7 dB/100m	1350 MHz:	24.9 dB/100m
100 MHz:	6.5 dB/100m	1750 MHz:	28.8 dB/100m
230 MHz:	9.8 dB/100m	2150 MHz:	32.3 dB/100m
400 MHz:	13.0 dB/100m	2400 MHz:	34.4 dB/100m
800 MHz:	18.7 dB/100m:	3000 MHz:	39.2 dB/100m
862 MHz:	19.5 dB/100m		Maximum attenuation is 10 % higher.

**REVISIONS**

#	Description	Date	Initials



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.