


<b>2170934</b>	<b>DATA SHEET</b>	
<b>valid from: 15.11.2021</b>	<b>ETHERLINE® Cat. 7 FLEX 4x2x26/7 AWG</b>	

### Application

Field of use:	Connecting cable for cabling systems acc. to ISO/IEC 11801 and EN 50173. Meeting the transmission requirements of IEC 61156-6, Category 7 and EN 50288-4-2.
Performance:	4-pair, screened foiled twisted pair cable (S/FTP), having a nominal impedance of 100 Ω, supporting a bandwidth of 10 Gbit/s (e.g. 100BASE-T, 1000BASE-T, 2.5GBASE-T, 5GBASE-T, 10GBASE-T) over up to 100 m.
Characteristics:	Flame retardant, halogen free, UV-resistant, oil resistant, abrasion resistant
Applications:	EtherCAT, EtherNet/IP and others

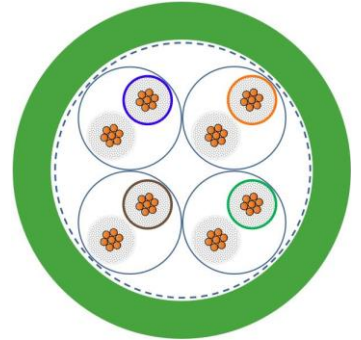


### Design

Certification	E63634 cRUus AWM Style 21238 80°C 600V I/II A/B acc. to UL 758 & CSA C22.2 No.210
Conductor	stranded bare copper 26/7 AWG
Insulation	polyolefin (foamed) core diameter: nom. 1.00 mm
Core identification code	pair 1: white/blue, pair 2: white/orange, pair 3: white/green, pair 4: white/brown (colored ring marking on the white cores is optional)
Stranding	2 cores stranded to pair, 4 pairs stranded to bundle
Pair screen	plastic laminated aluminium foil (overlapping)
Screen	braid of tinned copper wire (coverage ca. 70 %)
Outer sheath	PUR green, similar to RAL 6018 outer diameter: 6.4 mm (± 0.3 mm)

### Electrical properties at 20 °C

Loop resistance	≤ 29 Ω/100 m
Insulation resistance	≥ 5 GΩ×km
Mutual capacitance	nom. 46 nF/km
Transfer impedance	1 MHz: ≤ 15 mΩ/m 10 MHz: ≤ 10 mΩ/m 30 MHz: ≤ 30 mΩ/m 100 MHz: ≤ 100 mΩ/m
Coupling attenuation	30 MHz - 100 MHz: ≥ 85 dB 100 MHz - 600 MHz: ≥ 85 - 20×log <sub>10</sub> (f / 100)
Characteristic impedance	100 MHz: 100 Ω acc. to IEC 61156-6
Velocity of propagation	100 MHz: 0.78 c
Signal propagation time	4 MHz - 600 MHz: ≤ 480 ns/100 m
Delay skew	4 MHz - 600 MHz: ≤ 25 ns/100 m
Maximum operating voltage	EN: 100 V (not for power applications)
Rated voltage	UL: 600 V
Test voltage	core/core: 2000 V core/screen: 2000 V

Creator: KIOS / PDC	Document: DB2170934EN	Page 1 of 2
Released: ALTE / PDC	Version: 07	

<b>2170934</b>	<b>DATA SHEET</b>	
<b>valid from: 15.11.2021</b>	<b>ETHERLINE® Cat. 7 FLEX 4x2x26/7 AWG</b>	

### Electrical transmission properties at 20°C

The transmission characteristics meet the requirements of the standards EN 50288-4-2 and IEC 61156-6 for category 7. The normative requirements for the transmission properties are shown in the following table:

<b>f [MHz]</b>		<b>4</b>	<b>10</b>	<b>20</b>	<b>62,5</b>	<b>100</b>	<b>200</b>	<b>250</b>	<b>500</b>	<b>600</b>
(max.) Attenuation	[dB/100 m]	5,5	8,5	21,1	21,7	27,8	40,1	45,3	66,2	73,3
(min.) TCL	[dB]	34	30	27	22	20	17	16	13	12,2
(min.) EL TCTL	[dB/100 m]	23	15	9	—	—	—	—	—	—
(min.) NEXT	[dB]	80	80	80	75,5	72,4	67,9	66,5	61,9	60,8
(min.) PS EL FEXT	[dB/100 m]	77	71	65	55,1	51	45	43	37	35,4
(min.) ACR-F/EL FEXT	[dB/100 m]	80	74	68	58,1	54	48	46	40	38,4
(min.) Return Loss	[dB]	23	25	25	21,5	20,1	18	17,3	17,3	17,3

### Mechanical and thermal properties

Minimum bending radius	fixed:	4 × outer diameter
	occasional flexing:	10 × outer diameter
Temperature range	fixed:	-50 °C up to +80 °C
	occasional flexing:	-40 °C up to +80 °C
	UL/CSA:	80 °C
Flammability	flame retardant acc. to IEC 60332-1-2 resp. EN 60332-1-2 HFT acc. to UL 1581 §1090	
Halogen free	acc. to VDE 0472-815	
UV resistance	acc. to ISO 4892-2, method A	
Oil resistance	acc. to EN 50363-10-2	

### General requirements

This cable is conform to the EU-Directive 2011/65/EU (RoHS, Restriction of the use of certain hazardous substances) and the LV-Directive 2014/35/EU (Low voltage Directive).

### Environmental information

These cables meet the substance-specific requirements of the EU Directive 2011/65/EU (RoHS).

Creator: KIOS / PDC	Document: DB2170934EN	Page 2 of 2
Released: ALTE / PDC	Version: 07	