


2171906	<b>DATA SHEET</b>	
Valid from: 17.09.2018	<b>IE-EC-5-M12D-A-(L*)-P-2-26-FD-M12D-A</b>	

## Product description

Industrial Ethernet Patchcord, EtherCat, Cat.5e, angled plug M12 on angled plug M12, D-coded, PUR, for drag chain



This datasheet is also valid for other lengths configurations. Other lengths configurations on request.

## Product variations

Article number	Article description	Length (L*) [m]
2171906	IE-EC-5-M12D-A-0,5-P-2-26-FD-M12D-A	0,5
2171907	IE-EC-5-M12D-A-1-P-2-26-FD-M12D-A	1
2171908	IE-EC-5-M12D-A-2-P-2-26-FD-M12D-A	2
2171909	IE-EC-5-M12D-A-3-P-2-26-FD-M12D-A	3
2171910	IE-EC-5-M12D-A-5-P-2-26-FD-M12D-A	5
2171911	IE-EC-5-M12D-A-10-P-2-26-FD-M12D-A	10
2171912	IE-EC-5-M12D-A-15-P-2-26-FD-M12D-A	15
2171913	IE-EC-5-M12D-A-20-P-2-26-FD-M12D-A	20

## General properties, Patchcord

Outer diameter, cable	4.8 mm
Number of cores	4
Outer sheath	PUR
Outer sheath, color	green similar to RAL 6018
Mating cycles, M12 connector	100
Screening	SF/UTP


## General properties, cable

LAPP-Article number of cable	2170433
LAPP-Description of cable	ETHERLINE P EC FD Cat.5e
Conductor, outer diameter	ca. 0.15 mm
Conductor, material	tinned stranded copper
Insulation, outer diameter	ca. 1.00 mm
Insulation, material	Polyolefin
Core identification code	pair 1: white-orange, orange; pair 2: white-green, green
Stranding	star quad
Wrapping	PET tape
Screening	plastic laminated aluminum foil on top: braid of copper wire, coverage ca. 85%

Creator: MANA2/PDP	Document: DB2171906EN	Page 1 of 3
Released: IVSE1/PDP	Version: 03	

We reserve all rights according to DIN ISO 16016.

PD 0019/05\_04.18EN

2171906	<b>DATA SHEET</b>	
Valid from: 17.09.2018	<b>IE-EC-5-M12D-A-(L*)-P-2-26-FD-M12D-A</b>	

### Electrical properties, cable at 20°C

Resistance (loop)	≤ 142 Ω/km
Insulation material, specific electrical resistance	≥ 5 GΩ*km
Characteristic impedance (1 MHz to 100 MHz)	100 Ω ± 15 Ω
Operating peak voltage	125 V (not for power purposes)
Test voltage (rms 50 Hz, 1 min.), core-core	1500 V
Test voltage (rms 50 Hz, 1 min.), core-screening	1500 V

### Mechanical and thermal properties, cable

Minimum bending radius, during laying	16 x cable diameter
Minimum bending radius, fixed installation	4 x cable diameter
Permissible temperature range, during laying	-30 °C to +50 °C
Permissible temperature range, fixed installation	-40 °C to +80 °C
Flame propagation	flame retardant acc. UL 1581 (FT1)
Halogen free	halogen free acc. to VDE 0472-815
General requirements	Dangerous and forbidden substance acc. to RoHS directive (2011/65/EU) are not allowed to the manufacturing

### General properties, M12 connector

Coding	D
Protection degree	IP67/IP69 locked connector
Rated voltage max.	250 V
Rated current at 40°C	4 A
Ambient temperature	-30 °C bis +90 °C
Insulating resistance	≥ 10 <sup>8</sup> Ω
Locking nut with vibration protection	yes
Tightening torque	1,0 Nm


### Material, M12 connector

Contacts, base material	CuZn
Contacts, surface	Au
Grip body	TPU
Locking nut, base material	CuZn
Locking nut, surface	Ni


### Standards

Product standard, M12 connector	DIN EN 61076-2-101
---------------------------------	--------------------

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB2171906EN Version: 03	Page 2 of 3
---	--------------------------------------	-------------

2171906	<b>DATA SHEET</b>	
Valid from: 17.09.2018	<b>IE-EC-5-M12D-A-(L*)-P-2-26-FD-M12D-A</b>	

## Drawings

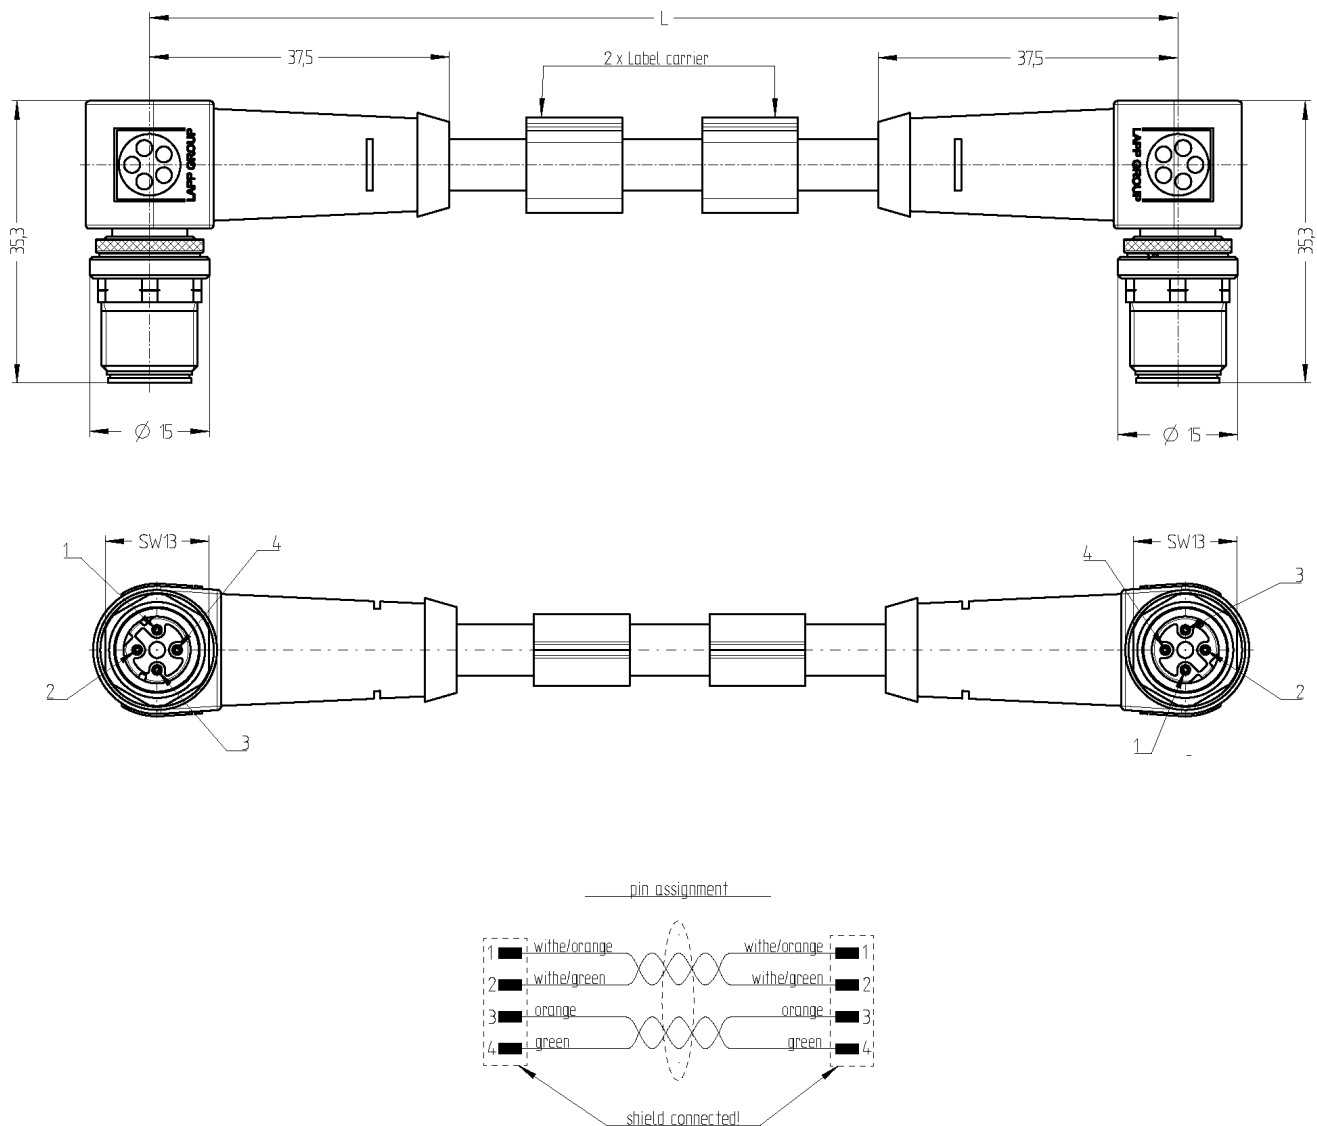

## Application range

Automation, industrial machinery and plant engineering

## Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB2171906EN Version: 03	Page 3 of 3
---	--------------------------------------	-------------