

5202 4848	<b>DATA SHEET</b>	
Valid from: 08.05.2018	<b>SKINDICHT® BLK-GL</b>	

The SKINDICHT® BLK-GL blind plug is made of mechanically resistant glass fibre reinforced polyamide and can be used for the closing of threaded holes.  
Application range: e.g. switch cabinet building, junction box, connection box



**Material:** Polyamide,  
glass fibre reinforced

**Technical Features:**


Connecting thread	PG 7 up to PG 48 acc. to DIN 40430
Protection class	IP 54 acc. to EN 60529
	IP 68 with O-Ring acc. to EN 60529
Temperature range	-40°C up to +100°C

**Colour:** Lightgrey, RAL 7035  
On Request: Black, RAL 9005



**Approbation:**

**Technical drawing:**

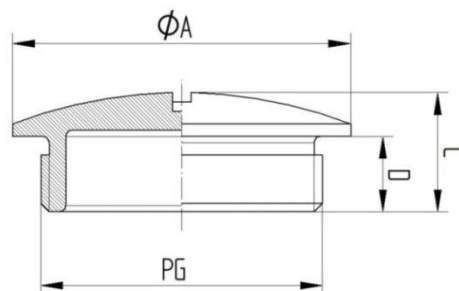

**Dimension table:**

PG	Ø A [mm]	C [mm]	D [mm]	Part No.	
				RAL 7035	RAL 9005
PG 7	15	8	6	5202 4848	
PG 9	19	9	6	5202 4849	
PG 11	22	10,5	7	5202 4850	
PG 13,5	25	10	6,5	5202 4851	
PG 16	27	10	6,5	5202 4852	5202 4844
PG 21	33	12	8	5202 4853	
PG 29	44	12	8	5202 4854	
PG 36	55	15	10	5202 4855	
PG 42	62	16	10	5202 4856	
PG 48	69	17	12	5202 4857	

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1/PDP Released: DAMU1/PDP	Document: DB52024848EN Version: 03	Page 1 of 1
--	---------------------------------------	-------------