


| | | |
|---------------------------|----------------------------|---|
| 55506715 | DATA SHEET |  |
| Valid from: 03.07.2018 | SILVYN® FPAG 90° PG | |

SILVYN® FPAG 90° PG is a conduit gland with a fast fit for a safety assembling. For the demounting we are recommending to use a screwdriver. The gland is suitable for SILVYN® FPAS and can be used in the machine- and plant constructions.



Material: PA 66

Features: Fast assembly
Anti-vibration
Suitable for fine and coarse conduits
High mechanical strength

Temperature range: -50°C up to +135°C


Colour: Grey
Black (UV-Resistant)


Norm Reference:    **UL FILE NUMBER E308201**

Note: Free of Halogen, Sulphur and Phosphorous

Protection class: IP 66

| | | |
|---|---------------------------------------|-------------|
| Creator: M. Wegerer /PDP Released: DAMU1/PDP | Document: DB55506715EN Version: 02 | Page 1 of 2 |
|---|---------------------------------------|-------------|

| | | |
|---------------------------|----------------------------|---|
| 55506715 | DATA SHEET |  |
| Valid from: 03.07.2018 | SILVYN® FPAG 90° PG | |

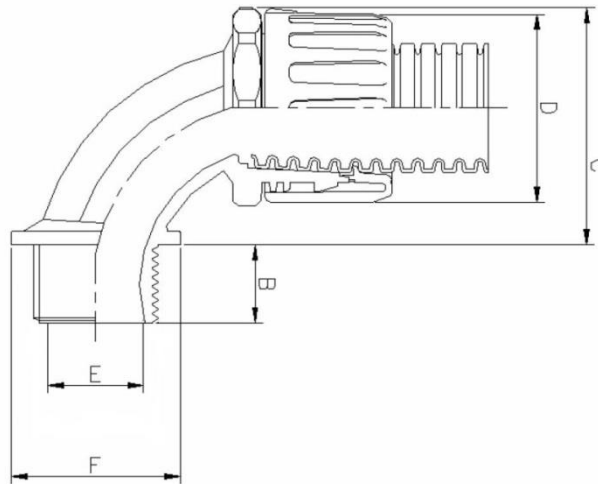

Dimension table:

| Part No. | Part name | NW | Length C mm | Thread Length B mm | Inner Ø E mm | Outer Ø D mm | Ø F mm |
|--------------|-------------------------------|----|----------------|--------------------------|--------------------|--------------------|-----------|
| Grey | | | | | | | |
| 5550 6710 | SILVYN® FPAG 90° PG 7 GY | 10 | 24 | 8 | 6,5 | 19 | 16 |
| 5550 6720 | SILVYN® FPAG 90° PG 9 GY | 13 | 36 | 10 | 10,5 | 24 | 22 |
| 5550 6730 | SILVYN® FPAG 90° PG 11 GY | 16 | 39 | 10 | 10,5 | 29 | 24 |
| 5550 6740 | SILVYN® FPAG 90° PG 13,5/1 GY | 16 | 40 | 11 | 14 | 29 | 26 |
| 5550 6750 | SILVYN® FPAG 90° PG 13,5/2 GY | 18 | 42 | 11 | 14 | 32 | 26 |
| 5550 6810 | SILVYN® FPAG 90° PG 13,5/3 GY | 21 | 42 | 11 | 14 | 32 | 26 |
| 5550 6760 | SILVYN® FPAG 90° PG 16 GY | 21 | 42 | 11 | 14 | 32 | 27 |
| 5550 6770 | SILVYN® FPAG 90° PG 21 GY | 28 | 54 | 12 | 19 | 44 | 35 |
| 5550 6780 | SILVYN® FPAG 90° PG 29 GY | 34 | 63 | 12 | 24,5 | 51 | 44 |
| 5550 6790 | SILVYN® FPAG 90° PG 36 GY | 42 | 87 | 12 | 39 | 63 | 57 |
| 5550 6800 | SILVYN® FPAG 90° PG 48/1 GY | 54 | 89 | 15 | 49,5 | 76 | 70 |
| 5550 6820 | SILVYN® FPAG 90° PG 48/2 GY | 67 | 105 | 15 | 49,5 | 90 | 70 |
| 5550 6710 | SILVYN® FPAG 90° PG 7 GY | 10 | 24 | 8 | 6,5 | 19 | 16 |
| Black | | | | | | | |
| 5550 6715 | SILVYN® FPAG 90° PG 7 BK | 10 | 24 | 8 | 6,5 | 19 | 16 |
| 5550 6725 | SILVYN® FPAG 90° PG 9 BK | 13 | 36 | 10 | 10,5 | 24 | 22 |
| 5550 6735 | SILVYN® FPAG 90° PG 11 BK | 16 | 39 | 10 | 10,5 | 29 | 24 |
| 5550 6745 | SILVYN® FPAG 90° PG 13,5/1 BK | 16 | 40 | 11 | 14 | 29 | 26 |
| 5550 6755 | SILVYN® FPAG 90° PG 13,5/2 BK | 18 | 42 | 11 | 14 | 32 | 26 |
| 5550 6815 | SILVYN® FPAG 90° PG 13,5/3 BK | 21 | 42 | 11 | 14 | 32 | 26 |
| 5550 6765 | SILVYN® FPAG 90° PG 16 BK | 21 | 42 | 11 | 14 | 32 | 27 |
| 5550 6775 | SILVYN® FPAG 90° PG 21 BK | 28 | 54 | 12 | 19 | 44 | 35 |
| 5550 6785 | SILVYN® FPAG 90° PG 29 BK | 34 | 63 | 12 | 24,5 | 51 | 44 |
| 5550 6795 | SILVYN® FPAG 90° PG 36 BK | 42 | 87 | 12 | 39 | 63 | 57 |
| 5550 6805 | SILVYN® FPAG 90° PG 48/1 BK | 54 | 89 | 15 | 49,5 | 76 | 70 |
| 5550 6825 | SILVYN® FPAG 90° PG 48/2 BK | 67 | 105 | 15 | 49,5 | 90 | 70 |
| 5550 6715 | SILVYN® FPAG 90° PG 7 BK | 10 | 24 | 8 | 6,5 | 19 | 16 |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

| | | |
|---|---------------------------------------|-------------|
| Creator: M. Wegerer /PDP Released: DAMU1/PDP | Document: DB55506715EN Version: 02 | Page 2 of 2 |
|---|---------------------------------------|-------------|