


55506305	DATA SHEET	
Valid from: 21.06.2023	SILVYN® FPAG-M	

SILVYN® FPAG-M is a conduit gland with a fast fit for a safety assembling.
 For the demounting we are recommending to use a screwdriver.
 The gland is suitable for SILVYN® FPAS and can be used in the machine- and plant constructions.



Material: PA66

Technical Features:

Connecting thread	M12x1,5 up to M63x1,5
Nominal width	NW 10 up to NW 67
Protection class	IP66 acc. to EN 60529
Temperature range	In combination with SILVYN® FPAS -50°C up to +135°C

Additional features:


Free of halogen, sulphur and phosphorous	
UV-Resistant	SILVYN® FPAS black

Colour: Grey
Black

Approvals:  


Reference standards: IEC 61386-1
IEC 61386-23

Suitable conduits: SILVYN® FPAS

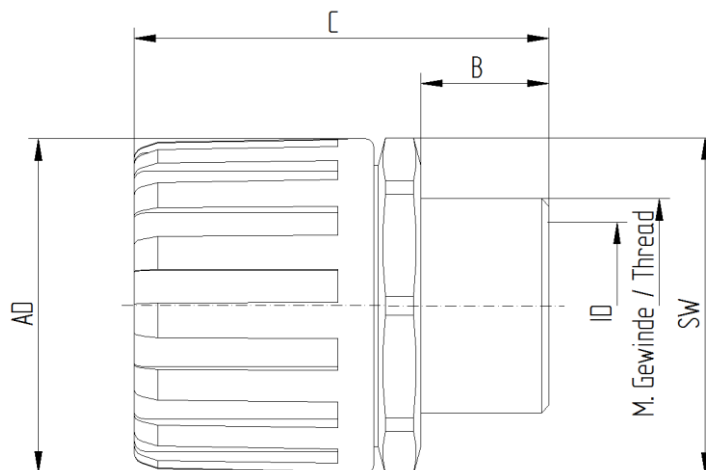

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1 /PDP Released: DAMU1/PDP	Document: DB55506305EN Version: 05	Page 1 of 2
---	---------------------------------------	-------------

55506305	DATA SHEET	
Valid from: 21.06.2023	SILVYN® FPAG-M	

Dimension table:

Part No.	NW	Thread	Thread length B mm	Length C mm	Inner Diameter ID mm	Outer Diameter AD mm	SW	UL
SILVYN FPAG-M Grey								
5550 6300	10	M12x1,5	9	33	7,5	19	19	✓
5550 6310	13	M16x1,5	11	37	11,0	24	23	✓
5550 6320	16	M16x1,5	11	41	11,0	29	28	✓
5550 6330	16	M20x1,5	14	44	14,5	29	28	✓
5550 7050	18	M20x1,5	14	44	14,5	32	30	✓
5550 6341	20	M20x1,5	14	44	14,5	32	30	-
5550 6340	21	M20x1,5	14	44	14,5	32	30	✓
5550 6351	25	M25x1,5	15	49	19,5	39	37	-
5550 6350	28	M25x1,5	15	49	19,5	44	42	✓
5550 6360	34	M32x1,5	16	53	26,5	51	49	✓
5550 6370	42	M40x1,5	16	60	32,5	63	60	✓
5550 6380	42	M50x1,5	16	60	40,5	63	60	✓
5550 6390	54	M50x1,5	16	65	42,0	76	73	✓
5550 6400	54	M63x1,5	16	65	53,0	76	73	✓
5550 6470	67	M63x1,5	16	70	56,0	90	87	✓
SILVYN FPAG-M Black								
5550 6305	10	M12x1,5	9	33	7,5	19	19	✓
5550 6315	13	M16x1,5	11	37	11,0	24	23	✓
5550 6325	16	M16x1,5	11	41	11,0	29	28	✓
5550 6335	16	M20x1,5	14	44	14,5	29	28	✓
5550 7055	18	M20x1,5	14	44	14,5	32	30	✓
5550 6346	20	M20x1,5	14	44	14,5	32	30	-
5550 6345	21	M20x1,5	14	44	14,5	32	30	✓
5550 6357	25	M25x1,5	15	49	19,5	39	37	-
5550 6355	28	M25x1,5	15	49	19,5	44	42	✓
5550 6365	34	M32x1,5	16	53	26,5	51	49	✓
5550 6375	42	M40x1,5	16	60	32,5	63	60	✓
5550 6385	42	M50x1,5	16	60	40,5	63	60	✓
5550 6395	54	M50x1,5	16	65	42,0	76	73	✓
5550 6405	54	M63x1,5	16	65	53,0	76	73	✓
5550 6475	67	M63x1,5	16	70	56,0	90	87	✓