


| | | |
|---------------------------|--------------------------|-------------------------------------------------------------------------------------|
| 6180 6550 | DATA SHEET |  |
| Valid from: 25.04.2018 | SILVYN® SINUS PA6 | |

The SILVYN® SINUS PA6 is a parallel corrugated protection conduit with a sinusoidal slit for the subsequent assembling on installed cable and wire.



Material: Polyamide 6

Technical features:

Profile Parallel corrugated with sinusoidal slit
 Nominal size NW 7,5 up to NW 23
 Temperature range -40°C up to +140°C


Additional features:

Fire classification HB acc. to UL94
 Free of halogen und cadmium
 UV-Resistant

Color: Black

Suitable glands: SILVYN® SPLIT GMP-M
 SILVYN® SPLIT COS
 SILVYN® FCL

Product drawing:

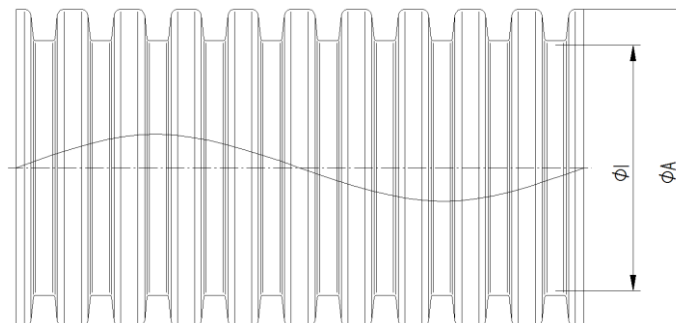

Dimension table:

| Part No. | NW | Diameter mm | | Max. Bending radius mm | Weight g/m |
|-----------|-----|-------------|------|------------------------|------------|
| | | ØI | ØA | | |
| 6180 6550 | 7,5 | 6,7 | 10,0 | 21 | 22 |
| 6180 6555 | 8,5 | 8,4 | 11,4 | 24 | 25 |
| 6180 6560 | 10 | 9,9 | 13,0 | 26 | 28 |
| 6180 6565 | 12 | 12,2 | 15,7 | 38 | 38 |
| 6180 6570 | 17 | 16,6 | 21,2 | 52 | 58 |
| 6180 6575 | 22 | 21,3 | 25,4 | 57 | 70 |
| 6180 6580 | 23 | 23,2 | 28,3 | 60 | 90 |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

| | | |
|------------------------------------------|---------------------------------------|-------------|
| Creator: MAU1/PDP Released: DAMU1/PDP | Document: DB61806550EN Version: 03 | Page 1 of 1 |
|------------------------------------------|---------------------------------------|-------------|