Description

- Optical fiber wall distribution

- Lockable

- Distribution plates not included

General characteristics

Cable entry	4 openings, dust-tight
Mountable splice cassettes (max.)	8
	alternatively: 4 + 1 distribution plate
Colour	RAL7035 (light grey)
Material	1.5 mm steel sheet
Weight	approx. 2 kg

Technical drawing

Dimensional drawing

Dimensional drawing

Wall mounting holes

Housing outer dimensions
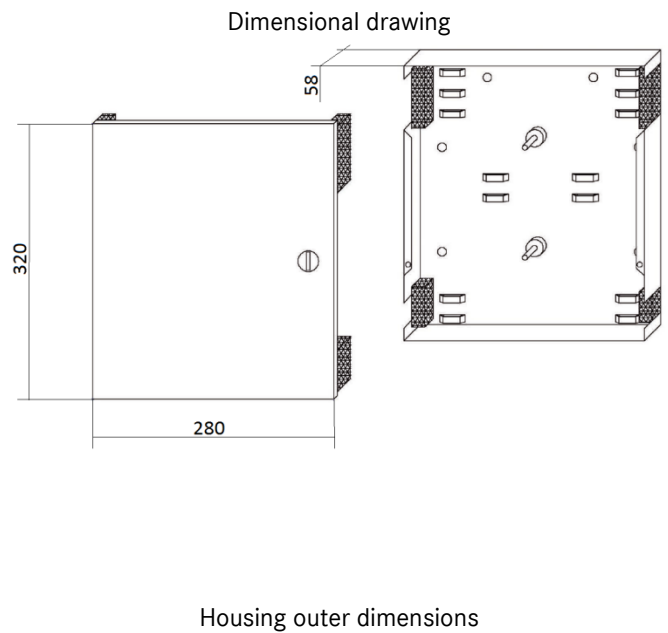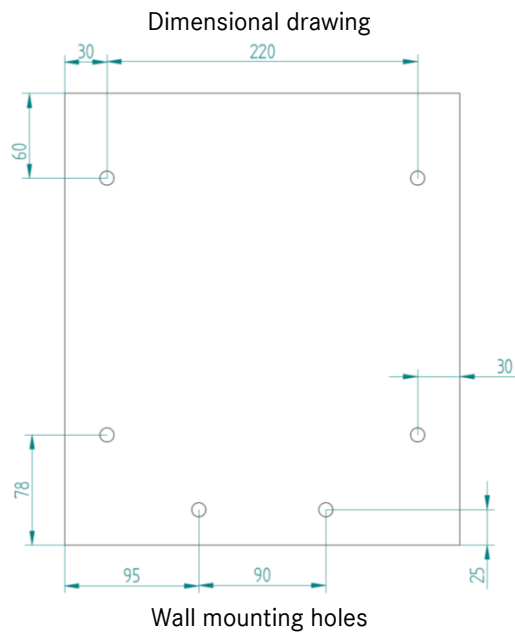
Application range

Office, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.