


# KVA-XXL-MS

for very large cable diameters

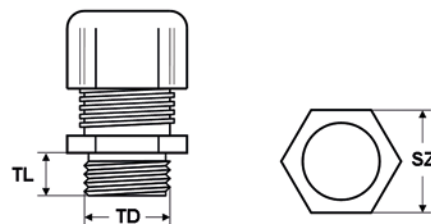

## TECHNICAL DATA

Nickel plated brass sealing gland

Temperature range -40°C to +135°C  
Protection class IP 68 - 10 bar

## ■ STRUCTURE

- Material: Brass, nickel plated
- Seal: thermoplastic vulcanizates (TPV)
- O-ring: Nitrile butadiene rubber (NBR)

## ■ PROPERTIES

- easy to assemble, time and cost savings
- Large-area sealing

- large clamping areas

## ■ APPLICATION

- Machine and plant construction
- Robotics
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

## ■ NOTES

- Legend:  
Dimensions  
TD - Thread Diameter  
TL - Thread Length  
SZ - Spanner Size

### metric thread

Part no.	Size	Cable Ø from / to mm	Thread length mm	Spanner size mm	Packaging unit (in pc.)
905957	M63 x 1.5	42.0 - 48.0	10.0	70	1
93569	M63 x 1.5	45.0 - 51.0	10.0	70	1
92779	M72 x 2.0	46.0 - 52.0	15.0	80	1
93727	M72 x 2.0	51.0 - 55.0	15.0	80	1
905958	M75 x 1.5	51.0 - 55.0	15.0	80	1
905959	M75 x 1.5	54.0 - 58.0	15.0	80	1
93105	M80 x 2.0	58.0 - 64.0	15.0	95	1
905960	M80 x 2.0	63.0 - 70.0	15.0	95	1
905961	M90 x 2.0	65.0 - 75.0	20.0	110	1
905962	M90 x 2.0	69.0 - 80.0	20.0	110	1
905963	M100 x 2.0	74.0 - 85.0	20.0	110	1
905964	M105 x 2.0	79.0 - 90.0	20.0	120	1
905965	M110 x 2.0	84.0 - 95.0	20.0	120	1
905966	M115 x 2.0	84.0 - 95.0	20.0	120	1

24.03.2023 / We reserve the right to make technical changes; the imprint in the image is purely exemplary