


## PRODUCT DATASHEET

### OTi DALI 100/220-240/24 1-4 CH P

CV Power supplies with DALI | CV Power supplies with DALI

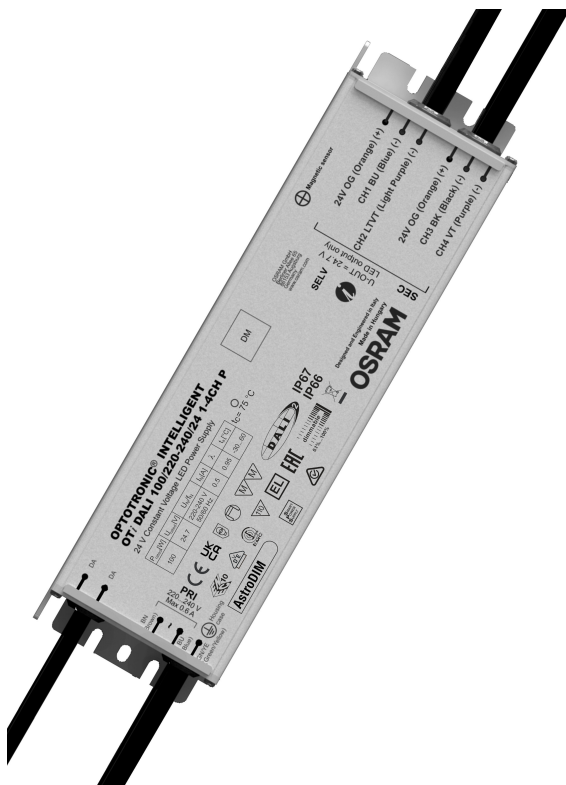

#### Areas of application

- Public squares and architecture lighting
- Suitable for indoor and outdoor SELV installations
- Suitable for use in luminaires of protection class I

#### Product benefits

- Long lasting and high reliability
- From 1 to 4 channels to arbitrarily distribute the power
- Suitable for installation under sunlight
- IP66/IP67 Salt mist resistant and DC functionality
- AstroDim functionality for automatic dimming and turn on/off

#### Product features

- 1 to 4 DALI addressable channels
- LED driver whose output power can be shared arbitrarily among the 2 or 4 channels
- AstroDim functionality
- Dimming range: 0/0, 1...100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- High level surge protection: up to 6 kV (L-N), 8 kV (L/N-PE)
- Inrush current limiter circuit

## TECHNICAL DATA

### Electrical data

Nominal wattage	100.00 W
Nominal output power	100 W
Nominal voltage	220...240 V
Nominal output voltage	24 V <sup>1)</sup>
Input voltage AC	198...264 V
Input voltage DC	176...276 V
U-OUT (working voltage)	24.7 V
Inrush current	55 A
Mains frequency	50/60 Hz
Total harmonic distortion	< 5 %
Power factor $\lambda$	> 0.95
ECG efficiency	93 %
Device power loss	7 W
Max. ECG no. on circuit breaker 10 A (B)	18
Max. ECG no. on circuit breaker 16 A (B)	29
Max. ECG no. on circuit breaker 25 A (B)	27
Surge capability (L/N-Ground)	8 kV
Surge capability (L-N)	6 kV
Galvanic isolation	SELV
Power loss in stand-by mode	< 0.5 W

<sup>1)</sup> DC voltage

### Dimensions & Weight

Length	237.00 mm
Mounting hole spacing, length	227,0 mm
Width	69.00 mm
Height	37.00 mm
Cable cross-section, input side	1 mm <sup>2</sup>
Cable cross-section, output side	1.5 mm <sup>2</sup>
Wire preparation length, input side	90 mm
Wire preparation length, output side	90 mm
Product weight	1150.00 g

### Colors & materials

Casing material	Aluminium
Body material	Aluminium

### Temperatures & operating conditions

Ambient temperature range	-20...+60 °C
Maximum temperature at tc test point	75 °C
Max.housing temperature in case of fault	110 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

<sup>1)</sup> Maximum 56 days/year at 85 %

### Lifespan

ECG lifetime	50000 h
--------------	---------

### Additional product data

Product remark	Emergency lighting: EL sign
----------------	-----------------------------

### Capabilities

Dimmable	Yes
Dimming interface	DALI-2
Dimming range	0...100 %
Overheating protection	Automatic reversible
Overload protection	Automatic reversible
No-load proof	Yes
Short-circuit protection	Automatic reversible
Suitable for fixtures with prot. class	I
Type of connection, output side	Wires

### Certificates & Standards

Approval marks – approval	CE / EAC / ENEC 10 / RCM / VDE / VDE-EMC
Standards	Acc. to EN 61347-2-13 / Acc. to EN 61547 / Acc. to EN 55015 / Acc. to EN 61000-3-2 / Acc. to EN 61000-3-3 / Acc. to EN 61347-1 / Acc. to EN 62493
Protection class	I
Type of protection	IP66/IP67






### LOGISTICAL DATA

Temperature range at storage	-40...+85 °C
------------------------------	--------------

### Energy labelling regulation data acc EU 2019/2015

Networked standby power for CLS	< 0.50 W
---------------------------------	----------

### DOWNLOAD DATA

Documents and certificates		Document name
	User Instruction	13865773 OPTOTRONIC LED Power Supply
	Declarations of conformity	OTI DALI 100-220-240-24 1-4 CH P
	Certificates	OT ENEC 40050684 060421
	Certificates	OTI DALI 100 1 4CH P NSW27729 080620
	Certificates	OT EMC 40038482 220421

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4062172119191	Folding box 1		1525.00 g	
4062172119207	Shipping box 6	287 mm x 262 mm x 201 mm	7480.00 g	15.11 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.