


PRODUCT DATASHEET

OT 110/170...240/1A0 4DIMLT2 G2 CE

OPTOTRONIC® Constant current LED power supplies with 4DIM-DALI and NFC | Constant Current - Outdoor - dimmable

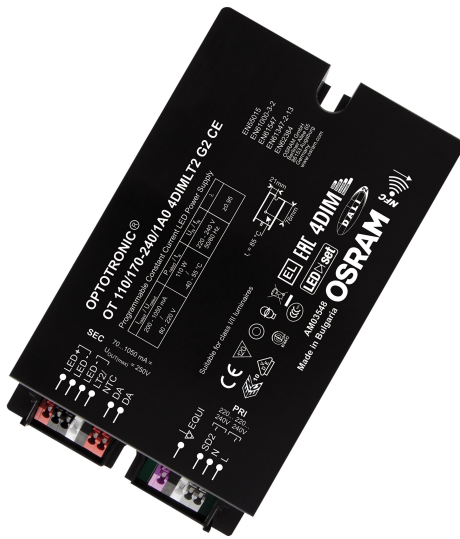

Areas of application

- Street and urban lighting
- Industry
- Suitable for outdoor applications in luminaires with IP > 54
- Suitable for use in outdoor luminaires of protection class I and II

Product benefits

- 4DIM functionality in one device (StepDIM, AstroDIM, MainsDIM, DALI)
- DALI-2 certified incl. Parts 251, 252, 253
- Easy and fast wireless luminaire programming
- Very high efficiency
- Wide current output range: 200 mA...1050 mA
- High surge protection: up to 10 kV (in protection class I or II)
- Great flexibility due to wide operating temperature range of -40...55 °C or 60 °C
- Protection through double isolation between mains input and LED output

Product features

- Supply voltage: 220...240 V
- Current output range: 70...1,050 mA
- Easy and fast wireless luminaire programming via NFC
- Flexible current setting with one additional wire (LEDset2)
- AstroDIM for autonomous dimming with five independent levels (astro, time mode)
- Allows for energy saving in twilight phases
- MainsDIM function for dimming via reduction of line voltage amplitude
- Isolated DALI interface for bidirectional telemanagement systems
- Standby power consumption: < 0.35 W

- Constant Lumen Output (CLO)
- Overtemperature protection via external NTC
- Integrated customizable thermal management (Driver Guard)

TECHNICAL DATA

Electrical data

| | |
|--|---------------------------|
| Nominal wattage | 110.00 W |
| Nominal output power | 110 W ¹⁾ |
| Nominal voltage | 220...240 V |
| Nominal output voltage | 80...220 V |
| Input voltage AC | 170...240 V |
| Input voltage DC | 176...276 V ²⁾ |
| U-OUT (working voltage) | 250 V |
| Nominal current | 0.52 A |
| Nominal output current | 200...1050 mA |
| Inrush current | 65 A ³⁾ |
| Output current tolerance | ±3 % ⁴⁾ |
| Output ripple current (100 Hz) | < 5 % |
| Mains frequency | 0/50/60 Hz |
| Total harmonic distortion | < 5 % ⁵⁾ |
| Power factor λ | > 0.98 ⁶⁾ |
| ECG efficiency | 93 % |
| Device power loss | 8,0 W |
| Max. ECG no. on circuit breaker 25 A (B) | 19 |
| Surge capability (L/N-Ground) | 10 kV |
| Surge capability (L-N) | 6 kV |
| Galvanic isolation | Double |

1) Max. 75% in DC operating mode

2) Additional fuse needed in DC operation

3) $t_{width} = 70 \mu s$ (measured at 50 % i_{peak})

4) +/- 5% for LEDset down to 300mA


5) At full power

6) At full load

Photometrical data

| | |
|---------------------------------|------|
| Flickering metric (Pst LM) | ≤1 |
| Stroboscope effect metric (SVM) | ≤0.4 |

Dimensions & Weight



| | |
|-------------------------------------|---------------------------|
| Length | 150.00 mm |
| Mounting hole spacing, length | 134 mm |
| Width | 90.00 mm |
| Height | 40.00 mm |
| Cable cross-section, input side | 0,2...1,5 mm ² |
| Cable cross-section, output side | 0,2...1,5 mm ² |
| Wire preparation length, input side | 8,5...9,5 mm |
| Product weight | 780.00 g |

Colors & materials

| | |
|-----------------|---------|
| Casing material | Plastic |
| Body material | Plastic |

Temperatures & operating conditions

| | |
|--|------------------------|
| Ambient temperature range | -40...+55 °C |
| Maximum temperature at tc test point | 85 °C |
| Max.housing temperature in case of fault | 110 °C |
| Permitted rel. humidity during operation | 5...85 % ¹⁾ |

¹⁾ Maximum 56 days/year at 85 %

Lifespan

| | |
|--------------|----------------------------------|
| ECG lifetime | 50000 h / 100000 h ¹⁾ |
|--------------|----------------------------------|

¹⁾ At maximum T_c = 85°C / 10% failure rate / At T_c = 73°C / 10% failure rate

Capabilities

| | |
|------------------------|---|
| Dimmable | Yes |
| Dimming interface | 4DIM / AstroDIM / DALI / MainsDIM / StepDIM |
| Dimming range | 10...100 % |
| Overheating protection | Automatic reversible |
| Overload protection | Automatic reversible |

| | |
|--|----------------------|
| No-load proof | Yes |
| Short-circuit protection | Automatic reversible |
| Max. cable length to lamp/LED module | 10 m |
| Suitable for fixtures with prot. class | I / II |

Certificates & Standards

| | |
|---------------------------|---|
| Approval marks – approval | CE / ENEC / VDE / VDE-EMC / CCC / EL / RCM |
| Standards | Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 62384 / Acc. to EN 55015:2006 + A1:2007 + A2:2009 / Acc. to EN 61547 / Acc. to FCC 47 part 15 class B / Acc. to IEC 61000-3-2 / Acc. to IEC 61000-3-3 / Acc. to IEC 62386-101 / Acc. to IEC 62386-102 / Acc. to IEC 62386-207 / UL-8750 |
| Protection class | I/II |
| Type of protection | IP20 |










LOGISTICAL DATA










| | |
|------------------------------|--------------|
| Temperature range at storage | -40...+85 °C |
|------------------------------|--------------|

Energy labelling regulation data acc EU 2019/2015

| | |
|---------------------------------|----------|
| Networked standby power for CLS | < 0.50 W |
|---------------------------------|----------|

DOWNLOAD DATA

| Documents and certificates | Document name |
|---|---|
|  User Instruction | OPTOTRONIC Outdoor |
|  Declarations of conformity | INOTEC-Conformity declaration AM03548 OT 110/170-240/1A0 4DIMLT2 G2 CE |
|  Declarations of conformity | EU Declaration of Conformity 3629845 |
|  Declarations of conformity | EU Declaration of Conformity 3806542 |
|  Declarations of conformity | EATON(CEAG)-Conformity declaration AM03548 OT 110/170-240/1A0 4DIMLT2 G2 CE |
|  Certificates | CB Test Certificate DE1-60243 |
|  Certificates | CCC Certificate 2018171002002265 |
|  Certificates | VDE EMC Certificate 40038482 |
|  Certificates | OT Outdoor CB DE1 62952 100220 |

| Documents and certificates | | Document name |
|--|--------------|--|
|  | Certificates | OT outdoor ENEC 40050684 100220 |
|  | Certificates | VDE ENEC Certificate 40043863 |
|  | Certificates | VDE EMC Certificate 40044675 (EN) |
|  | Certificates | OT 110 4DIM LT2 G2 INOTEC AM35339 210520 |
|  | Certificates | VDE ENEC Certificate 40043863 appendix |
|  | Certificates | OT EMC 40050085 200220 |
|  | Certificates | OT 110 4DIM LT2 G2 EATON AM35339 210520 |
|  | Certificates | RCM Certificate CS10824N |
| CAD/BIM files | | Document name |
|  | CAD_STEP_3D | OT 110W 4DIM G2 |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4052899981959 | Unpacked 1 | | | |
| 4052899982048 | Shipping box 10 | 385 mm x 300 mm x 125 mm | 8141.00 g | 14.44 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.