


PRODUCT DATASHEET

DR DIM-PFM -40/220-240/24/P

LED DRIVER 1-10 V DIM PERFORMANCE | Constant voltage outdoor LED driver with 1-10 V dimming interface

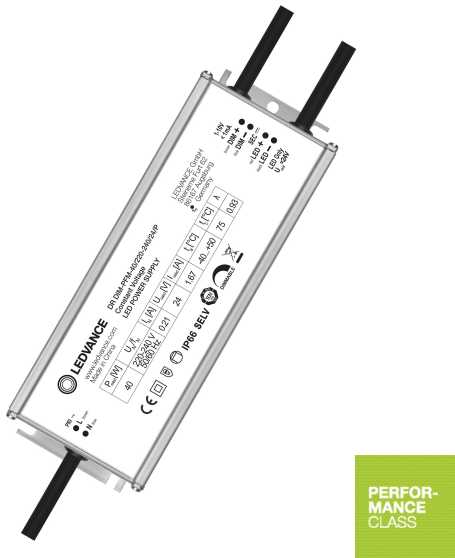

Areas of application

- Suitable for indoor and outdoor installations
- Facade and building illumination
- Ideal for illuminating public spaces
- Bathrooms, kitchens and outdoor areas
- Offices, shopping centers, hospitals, restaurants, hotels

Product benefits

- Perfectly matched to 24 V LED flexible strips
- 5 years guarantee
- Very stable output power
- Quick and simple installation due to prewiring
- High efficiency and reliability
- Installation in very cold and hot environments

Product features

- Available in 20 W, 40 W, 60 W, 100 W, 150 W and 250 W
- Dimmable via 1...10 V dimming control
- Dimmable from 10...100 %
- Lifetime: up to 50,000 h (at max. tc temperature)
- Type of protection: IP66
- Operating temperature range at ta: -40...50 °C
- Supply voltage: 220...240 V
- Operating frequency: 50/60 Hz
- Surge protection: up to 6 kV (L-N), 6 kV (L/N-PE)
- Short-circuit and overload protection

TECHNICAL DATA

Electrical data

Nominal wattage	40.00 W
Nominal output power	40 W ¹⁾
Nominal voltage	220...240 V
Nominal output voltage	24 V ²⁾
Input voltage AC	198...264 V ³⁾
U-OUT (working voltage)	24 V
Type of current	DC
Nominal current	215 mA
Nominal output current	1670 mA ⁴⁾
Inrush current	38 A
Output ripple current (100 Hz)	5.88 %
Mains frequency	50...60 Hz
Total harmonic distortion	< 20 % ⁵⁾
Power factor λ	0.93 ⁶⁾
ECG efficiency	88 % ⁷⁾
Device power loss	5.5 W ⁸⁾
Max. ECG no. on circuit breaker 10 A (B)	15
Max. ECG no. on circuit breaker 16 A (B)	19
Max. ECG no. on circuit breaker 25 A (B)	30
Surge capability (L/N-Ground)	6 kV
Surge capability (L-N)	6 kV
Galvanic isolation	SELV

1) From 0 to 40 W

2) Maximum 24 V

3) Permitted voltage range

4) $\pm 10\%$


5) At full load, 220...240 V, 50 Hz

6) Full load at 230 V

7) At full load and 230 V

8) At maximum LED load of 40 W

Dimensions & Weight



Length	179.00 mm
Mounting hole spacing, length	170,0 mm
Width	63.00 mm
Height	38.00 mm
Cable cross-section, input side	1 mm ²
Cable cross-section, output side	1 mm ²
Prewired	Yes
Product weight	740.00 g

Colors & materials

Product color	Aluminum
Casing material	Metal
Body material	Metal

Temperatures & operating conditions

Ambient temperature range	-40...+50 °C
Maximum temperature at tc test point	75 °C
Temperature range in operation	-40...+50 °C
Permitted rel. humidity during operation	20...95 % ¹⁾

¹⁾ Maximum 56 days/year at 95%

Lifespan

ECG lifetime	50000 h ¹⁾
--------------	-----------------------

¹⁾ At maximum T_c = 75°C / 10% failure rate

Additional product data

Encapsulated	Yes
--------------	-----

Capabilities

Dimmable	Yes
Dimming interface	1...10 V
Dimming range	10...100 %
Overheating protection	No
Overload protection	No
Short-circuit protection	Yes
Max. cable length to lamp/LED module	10 m
Suitable for fixtures with prot. class	I / II

Suitable for emergency lighting	No
Type of connection, output side	Cables

Certificates & Standards

Approval marks – approval	CE / TUV
Standards	Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 55015 / Acc. to EN 61547 / Acc. to EN 61000-3-2 / Acc. to EN 62384
Protection class	II
Type of protection	IP66

LOGISTICAL DATA

Temperature range at storage	-40...+80 °C
------------------------------	--------------

Accessories Optional

Product image	Product name	EAN
	LS PFM -300/827/5/IP66	4058075236622
	LS VAL -300/865/5/IP65	4058075296275
	LS VAL -600/865/5/IP65	4058075296633
	LS PFM -600/840/5	4058075236486
	LS VAL -300/840/5	4058075296121
	LS VAL -600/865/5	4058075296992
	LS PFM -600/865/5/IP66	4058075237001

Product image	Product name	EAN
	LS VAL -300/865/5	4058075296152
	LS VAL -600/840/5/IP65	4058075296602
	LS PFM -600/840/5/IP66	4058075236981
	LS SUP -500/960/5/IP67	4058075237346
	LS VAL -300/830/5/IP65	4058075296213
	LS SUP -500/965/5	4058075237100
	LS VAL -600/827/5	4058075296664
	LS VAL -300/830/5	4058075296091
	LS VAL -600/827/5/IP65	4058075296541
	LS SUP -500/940/5	4058075237087
	LS VAL -300/827/5/IP65	4058075296183
	LS PFM -600/830/5	4058075236448

Product image	Product name	EAN
	LS PFM -300/827/5	4058075236387
	LS PFM -300/830/5/IP66	4058075236660
	LS PFM -300/840/5	4058075236523
	LS PFM -600/865/5	4058075236547
	LS VAL -600/830/5	4058075296787
	LS PFM -300/865/5	4058075236585
	LS VAL -600/840/5	4058075296930
	LS PFM -600/827/5	4058075236400
	LS PFM -300/865/5/IP66	4058075236707
	LS PFM -600/830/5/IP66	4058075236967
	LS SUP -500/930/5	4058075237063
	LS VAL -600/830/5/IP65	4058075296572

Product image	Product name	EAN
	LS PFM -300/840/5/IP66	4058075236806
	LS SUP -500/940/5/IP67	4058075237322
	LS PFM -600/827/5/IP66	4058075236943
	LS VAL -300/840/5/IP65	4058075296244
	LS SUP -500/930/5/IP67	4058075237285
	LS VAL -300/827/5	4058075296060
	LS PFM -300/830/5	4058075236424
	LS SUP -500/927/5	4058075237049
	LS SUP -500/927/5/IP67	4058075237261

DOWNLOAD DATA

Documents and certificates	Document name
User Instruction	LED DRIVER DIM PERFORMANCE CV OUTDOOR
Declarations of conformity	EU Declaration of Conformity 3581723

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075379176	Folding box 1	237 mm x 89 mm x 47 mm	793.00 g	0.99 dm ³
4058075379183	Shipping box 10	254 mm x 196 mm x 263 mm	8307.00 g	13.09 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.