

# PRODUCT DATASHEET

## LB FLEX 1500 DALI P 140W 840 N

LOW BAY FLEX 1500 DALI | Low-bay luminaires with attractive linear design, up to 160 lm/W with DALI-2 technology



### Areas of application

- Replacement for luminaires with mercury vapor or metal halide lamps
- Warehouses
- Logistics halls
- Industrial and storage facilities
- Discounters, supermarkets
- Sports halls
- Indoor sports facilities

### Product benefits

- High compatibility thanks to DALI-2 certification
- Economical thanks to high luminous efficacy up to 160 lm/W
- Easy and quick installation thanks to toolless connector box with 5- and 7-pole terminals
- Modern and robust design
- 5 years guarantee

### Product features

- DALI-2 certified
- Suitable for emergency central battery installations acc. to EN 60598-2-22
- Different luminous flux and beam angle for mounting heights of ~ 4 m to ~14 m in 4000 K
- Through-wiring cable already installed
- Long Lifetime (L80/B10): up to 100,000 h
- High color consistency:  $\leq 3$  SDCM




## TECHNICAL DATA

### Electrical data


|   |                               |
|---|-------------------------------|
| Nominal wattage   | 140 W                         |
| Nominal voltage   | 220...240 V                   |
| Mains frequency   | 0/50/60 Hz                    |
| Nominal current   | 650 mA                        |
| Inrush current  | 17.7 A                        |
| Inrush current time $T_{h50}$                               | 162 $\mu$ s                   |
| Max. number of luminaires per miniature circuit breaker B16 | 16                            |
| Max. number of luminaires per miniature circuit breaker C10 | 16                            |
| Max. number of luminaires per miniature circuit breaker C16 | 16                            |
| Power factor $\lambda$                                      | $\geq 0.90$                   |
| Total harmonic distortion                                   | $\leq 20\%$                   |
| Protection class  | I                             |
| Operating mode  | Electronic control gear (ECG) |

### Photometrical data

|  |                        |
|--|------------------------|
| Luminous flux                                | 22000 lm               |
| Luminous efficacy                            | 155 lm/W               |
| Color temperature                            | 4000 K                 |
| Light color (designation)                    | Cool White             |
| Color rendering index Ra                     | $\geq 80$              |
| Standard deviation of color matching         | $< 3$ sdc <sub>m</sub> |
| Low flicker                                  | Yes                    |
| Photobiological safety group acc. to EN62778 | RG1                    |
| Photobiological safety group acc. to EN62471 | RG1                    |
| Beam angle                                   | 60 °                   |

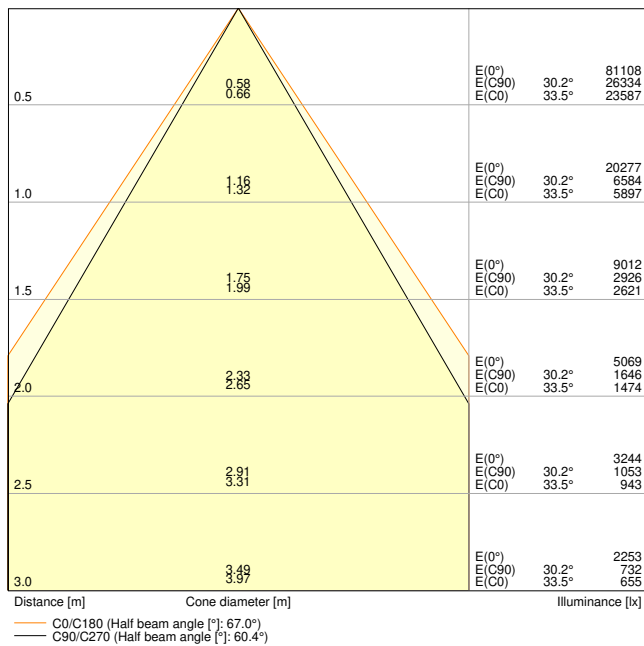


LB FLEX 1500 DALI P 140W 840 N

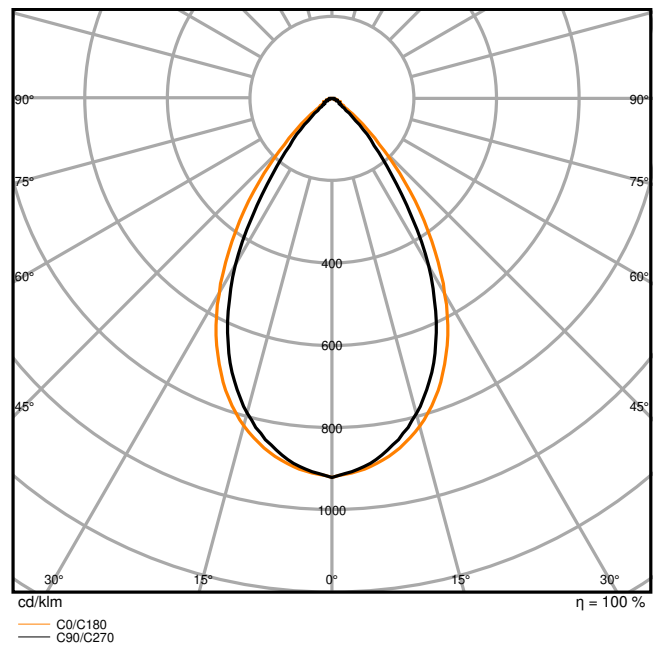

LB FLEX 1500 DALI P 140W 840 N

Dimensions & Weight

|                |            |
|----------------|------------|
| Length         | 1527.00 mm |
| Width          | 115.00 mm  |
| Height         | 65.00 mm   |
| Product weight | 4150.00 g  |



LOW BAY FLEX 1500

Materials & Colors

|  |                    |
|--|--------------------|
| Product color                              | White              |
| Housing color                              | White              |
| Body material                              | Steel              |
| Cover material                             | Polycarbonate (PC) |
| Light emitting surface material            | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C             |
| Mercury content                            | 0.0 mg             |

### Application & Mounting

|  |  |
|--|--|
| Ambient temperature range              | -25...+50 °C   |
| Temperature range at storage           | -20...+80 °C   |
| Type of connection                     | SCREWLESS TERMINAL, 7-POLE (L1, L2, L3, N, PE, DA, DA) |
| Type of protection                     | IP23   |
| Protection class IK (shock resistance) | IK08   |
| Dimmable                               | Yes  |
| Type of dimming                        | DALI2  |
| Mounting type                          | Surface/Suspended                                      |
| Mounting location                      | Ceiling  |
| Application environment                | Indoor   |
| Adjustable                             | No   |
| LED module replaceable                 | Not replaceable  |
| With light source                      | Yes  |

### Lifespan

|                            |                        |
|----------------------------|------------------------|
| Lifespan L70/B50 at 25 °C  | 100000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 100000 h <sup>1)</sup> |
| Lifespan L90/B10 at 25 °C  | 51000 h                |
| Number of switching cycles | 50000                  |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                             |   |
|-----------------------------|---|
| Output current              | 600 mA                                    |
| ECG - Output ripple current | < 10 %                                    |
| Recommended control gear    | TRIDONIC/LCA 50W 100-400mA one4all Ip PRE |

### Emergency lighting

|   |         |
|---|---------|
| Wattage in emergency operation mode       | 22.6 W  |
| Luminous flux in emergency operation mode | 3568 lm |











### Certificates & Standards





|  |                                       |
|--|---------------------------------------|
| Standards  | CE / CB / ENEC / TÜV SÜD / EAC / UKCA |
| Luminaire with limited surface temperature, "D sign" | No                                    |
| Ball shot safe                                       | No                                    |

### EQUIPMENT / ACCESSORIES

– Suspension kit, ball-proof cover and angulation mounting kit available as separate accessory

### DOWNLOAD DATA

| Documents and certificates   |                                 | Document name                  |
|--|---------------------------------|--------------------------------|
|    | User Instruction                | UI Lowbay Flex                 |
|   | Addon Technical Information     | LS Insert LB FLEX DALI         |
|  | Legal information               | Legal Insert LB FLEX DALI      |
|  | Declarations of conformity      | LB FLEX                        |
|  | Declarations Of Conformity UKCA | LB FLEX                        |
| Photometric and lighting design files  |                                 | Document name                  |
|  | IES file (IES)                  | LB FLEX 1500 DALI P 140W 840 N |
|  | LDT file (Eulumdat)             | LB FLEX 1500 DALI P 140W 840 N |
|  | ULD file (DIALux)               | LB FLEX 1500 DALI P 140W 840 N |
|  | ROLF file (RELUX)               | LB FLEX 1500 DALI P 140W 840 N |
|  | UGR file (UGR table)            | LB FLEX 1500 DALI P 140W 840 N |
|  | LDC typ cone                    | LB FLEX 1500 DALI P 140W 840 N |


| Photometric and lighting design files  |                  | Document name                               |
|--|------------------|---|
|  | LDC typ polar    | LB FLEX 1500 DALI P 140W 840 N              |
| CAD/BIM files  |                  | Document name                               |
|  | BIM_Revit_3D     | LOW BAY FLEX                                |
|  | CAD_STEP_3D      | LB FLEX 1500                                |
| Tender texts   |                  | Document name                               |
|  | Tender documents | LOW BAY FLEX 1500 DALI DALI P 140W 840 N-EN |

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                 |
|---------------|------------------------------|--------------------------------------|--------------|------------------------|
| 4099854163999 | Folding box<br>1             | 106 mm x 1,572 mm x 154 mm           | 4605.00 g    | 25.66 dm <sup>3</sup>  |
| 4099854164002 | Shipping box<br>3            | 1,602 mm x 488 mm x 143 mm           | 16253.00 g   | 111.79 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

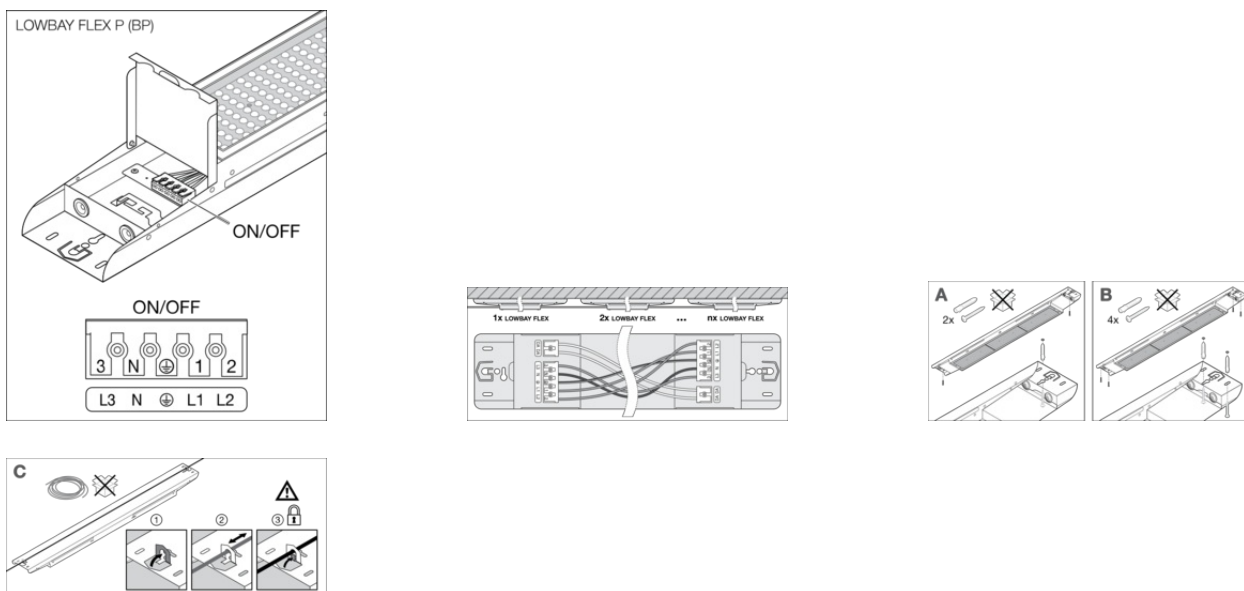

## References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.