


PRODUCT DATASHEET

PL COMP 600 V 35W 830 840 U19 DALI

PANEL COMPACT 600 UGR<19 DALI 2CCT | Square recessed panel luminaires with CCT select feature and low glare, for 600 x 600 mm ceiling systems and DALI-2 technology

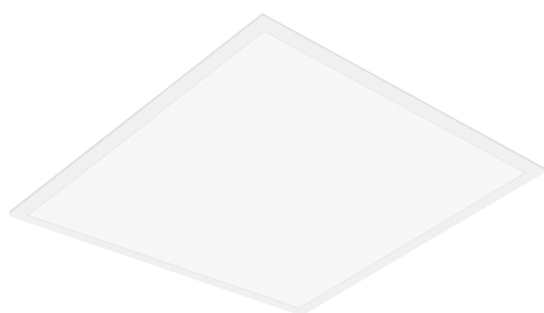

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

Product benefits

- Highly versatile due to selectable CCT
- Good glare reduction (UGR < 19)
- Low flicker light thanks to special electronic control gear
- External driver for extended flexibility and easy installation
- Suitable for emergency lighting
- 5 years guarantee

Product features

- Suitable for central battery emergency installations acc. to EN 60598-2-22
- Push DIM function for dimming and switching directly on a pushbutton
- Extruded aluminum frame
- Polystyrene diffuser
- Lifetime (L80/B10): up to 50,000 h (at 25 °C)

TECHNICAL DATA

Electrical data


Nominal wattage	35.00 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	175.000 mA
Inrush current	1.7 A
Inrush current time T_{h50}	52 μ s
Max. number of luminaires per miniature circuit breaker B16	83
Max. number of luminaires per miniature circuit breaker C10	52
Max. number of luminaires per miniature circuit breaker C16	83
Power factor λ	> 0.90
Total harmonic distortion	< 10 %
Protection class	II
Operating mode	External LED driver

Photometrical data

Luminous flux	3850 lm
Luminous efficacy	110 lm/W
Color temperature	3000 K / 4000 K
Light color (designation)	Warm White / Cool white
Color rendering index Ra	> 80
Standard deviation of color matching	5 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	90 °
UGR	< 19
1	

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	32.00 mm
Product weight	1900.00 g

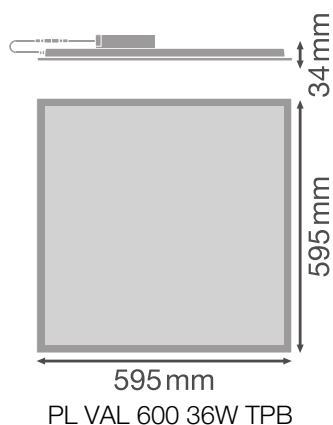

Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Cover material	Polystyrene (PS)
Light emitting surface material	Polystyrene
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 4-Pole (L,N, DA+, DA-)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	Yes
Type of dimming	DALI2
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Mounting length	575 mm
Mounting width	595.00 mm
Mounting depth	50,0 mm
Adjustable	No
LED module replaceable	Not replaceable
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	70000 h ¹⁾
Lifespan L80/B10 at 25 °C	50000 h ¹⁾
Lifespan L90/B10 at 25 °C	40000 h
Number of switching cycles	50000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	700 mA
ECG - Output ripple current	< 7 %
ECG - Length	168 mm
ECG - Width	44 mm
ECG - Height	32,0 mm
Recommended control gear	LEDV DR DALI-P-44/220-240/1050; Tridonic LCA 45W 500-1400mA one4all SC PRE

Emergency lighting

Luminous flux in emergency operation mode	400 lm
---	--------

Certificates & Standards

Standards	CE / CB / TÜV / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No


Additional product data




Added function	MULTI SELECT
----------------	--------------










EQUIPMENT / ACCESSORIES


- Separate switch preinstalled to choose preferred CCT during installation
- Accessories for several mounting options available
- Security rope for luminaire included
- Security brackets preinstalled
- External control gear included
- Suitable for use with separate Emergency Conversion Box
- Connector box with 5-pole terminal for through-wiring separately available for cable cross sections up to 2.5 mm²


DOWNLOAD DATA

Documents and certificates	Document name
 User Instruction	PANEL COMPACT DALI

Documents and certificates		Document name
	Addon Technical Information	LSI PANEL COMPACT 600 625
	Legal information	Legal Insert PANEL COMPACT
	Legal information	EM Insert PL COMP

Photometric and lighting design files		Document name
	IES file (IES)	PL COMP 600 V 35W 830 U19 PS DALI 3850lm
	IES file (IES)	PL COMP 600 V 35W 840 U19 PS DALI 3850lm
	LDT file (Eulumdat)	PL COMP 600 V 35W 830 U19 PS DALI 3850lm
	LDT file (Eulumdat)	PL COMP 600 V 35W 840 U19 PS DALI 3850lm
	ULD file (DIALux)	PL COMP 600 V 35W 830 840 U19 DALI
	ROLF file (RELUX)	PL COMP 600 V 35W 830 840 U19 DALI
	UGR file (UGR table)	PL COMP 600 V 35W 830 U19 PS DALI 3850lm
	LDC typ cone	PL COMP 600 V 35W 830 U19 PS DALI 3850lm
	LDC typ polar	PL COMP 600 V 35W 830 U19 PS DALI 3850lm

CAD/BIM files		Document name
	CAD_STEP_3D	PL COMP 600

Tender texts		Document name
	Tender documents	PANEL COMPACT 600 UGR19 DALI 2CCT 35W 830 840 U19 DALI-EN




LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854206603	Folding box 1	602 mm x 37 mm x 662 mm	2330.00 g	14.75 dm ³
4099854206610	Shipping box 4	677 mm x 164 mm x 628 mm	10230.00 g	69.73 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products.

When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

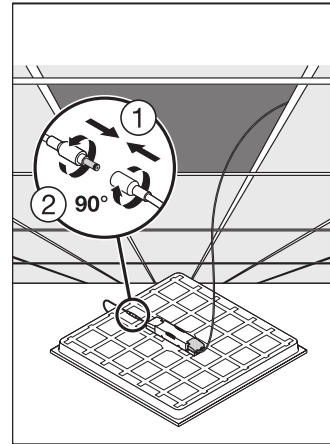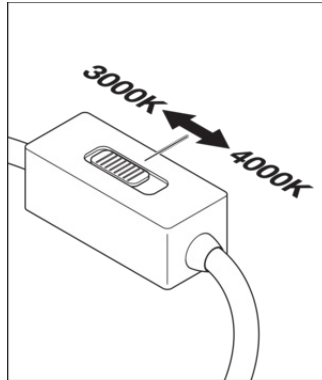

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.